

# Samsung Tizen 7 - LoopSign Deployment Guide

## LoopSign Samsung App

Please note that you need to have a Digital Signage screen from Samsung with Tizen7 SOC. Consumer models does not have the necessary built-in features.

It's always a good idea to have the latest firmware – check with your reseller.

### Content

1. Prerequisites.....	2
2. General settings – First time installation guide.....	2
3. Install/Configure .....	8
4. Configure LoopSign to connect to your screen .....	12

## 1. Prerequisites

Make sure you have a Tizen7 based Professional Signage screen with the latest firmware. Contact your reseller, Samsung, or us directly to get the latest firmware.

Please note that consumer screen models will not work with Digital Signage, they do not have the necessary settings and features.


**This guide is based on Samsung Tizen 7 SOC**

## 2. General settings – First time installation guide


- Go through the first time installation guide




Connect to network (ethernet recommended)

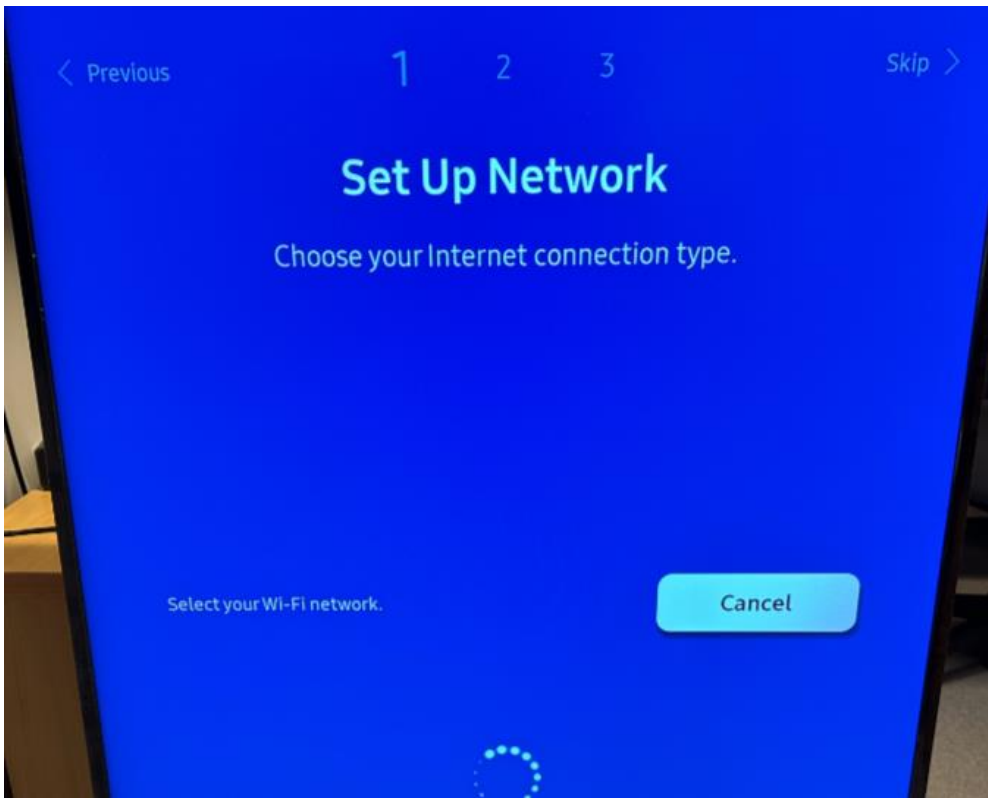

Choose "OK"

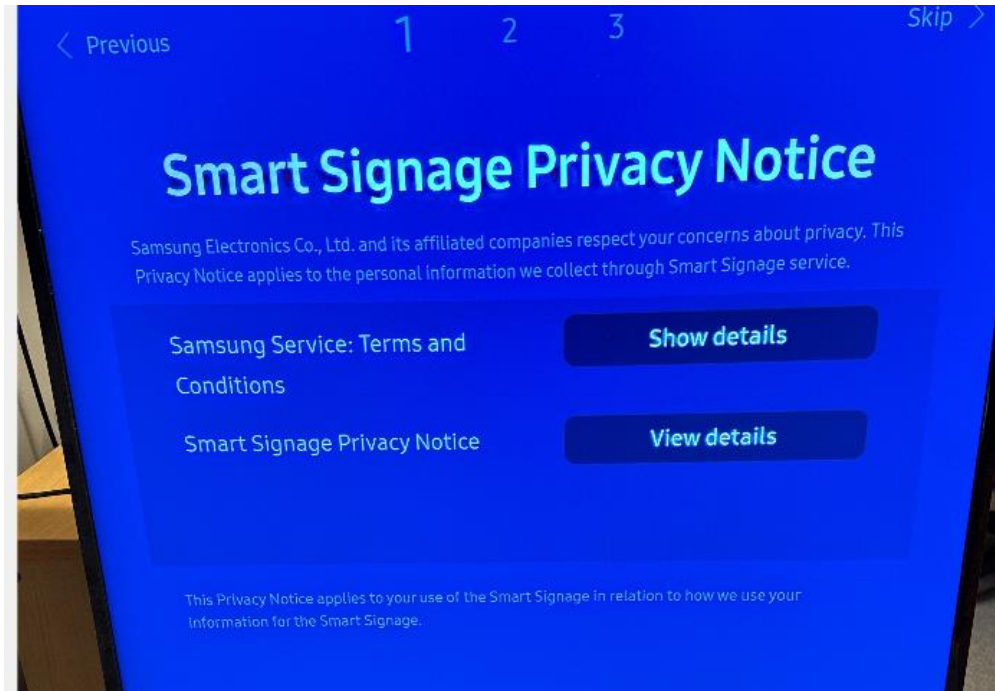

- Choose "Manual Setup"

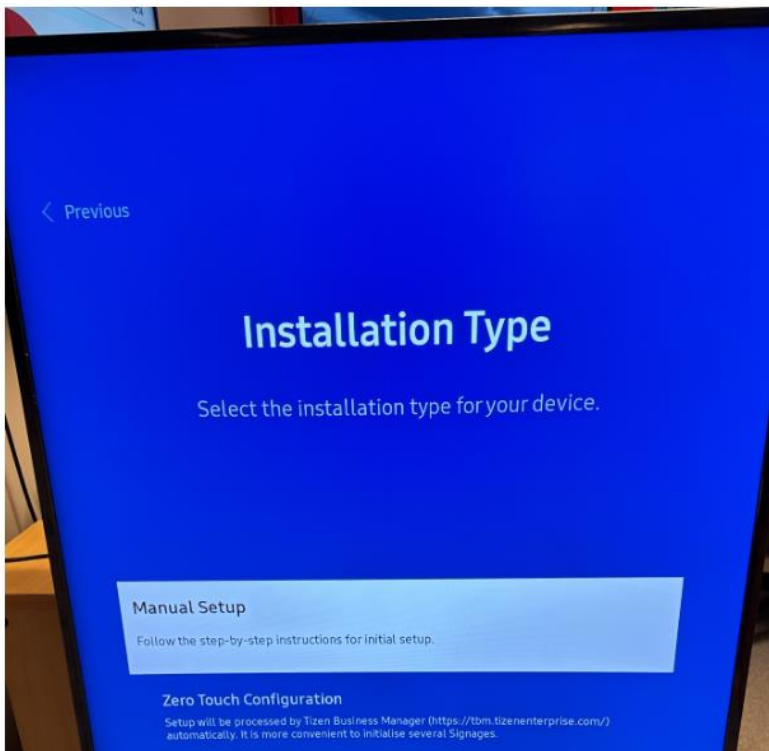


- Choose "Auto"




Choose "Custom App"




Enter URL: <https://loop24.no/s7>

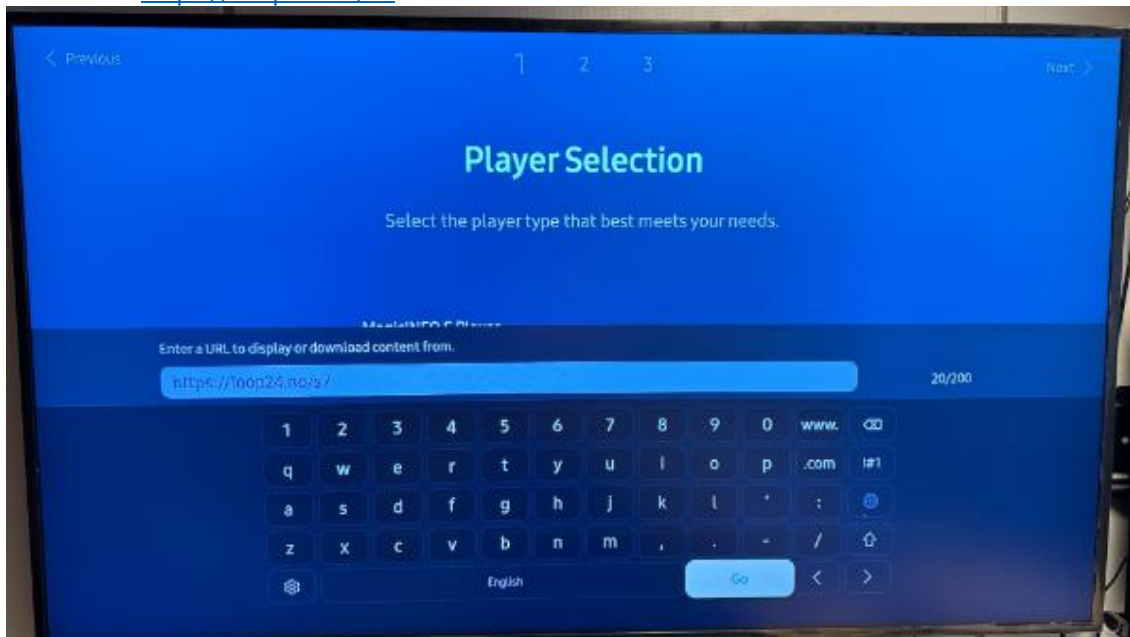


Choose «Skip»

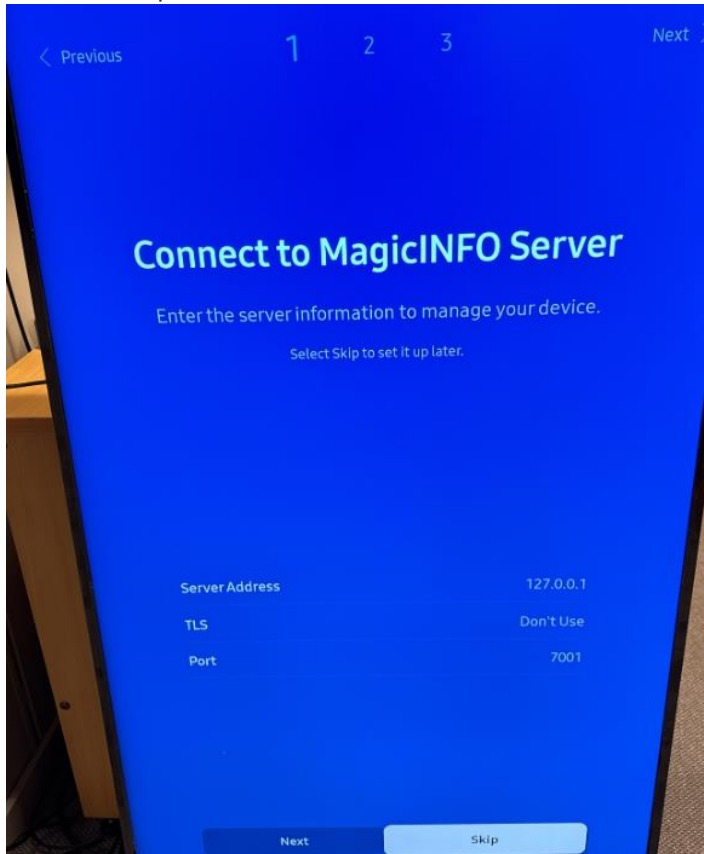


Choose «Off»

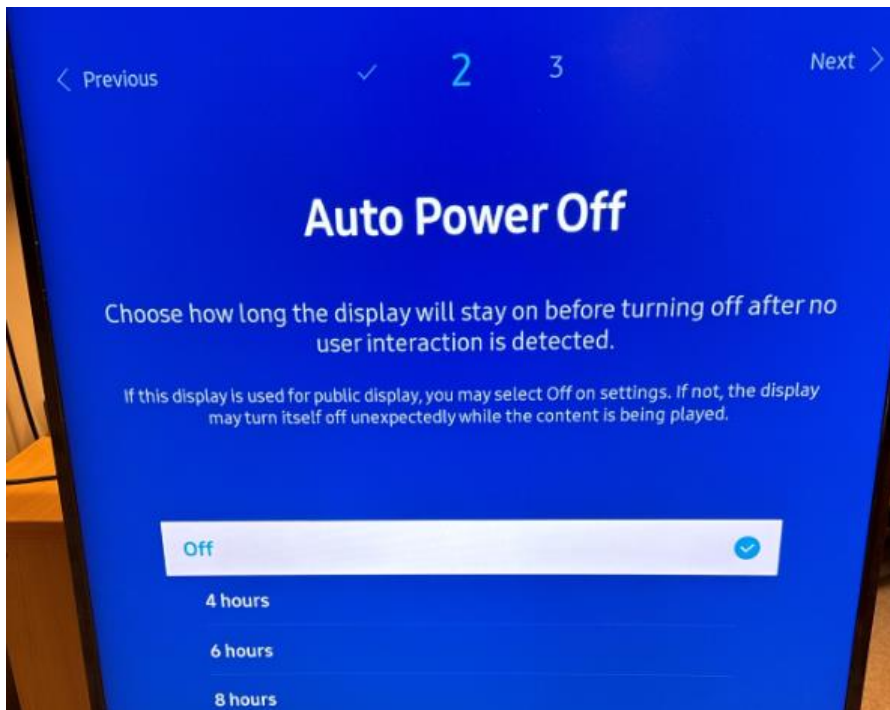

- Set date and time

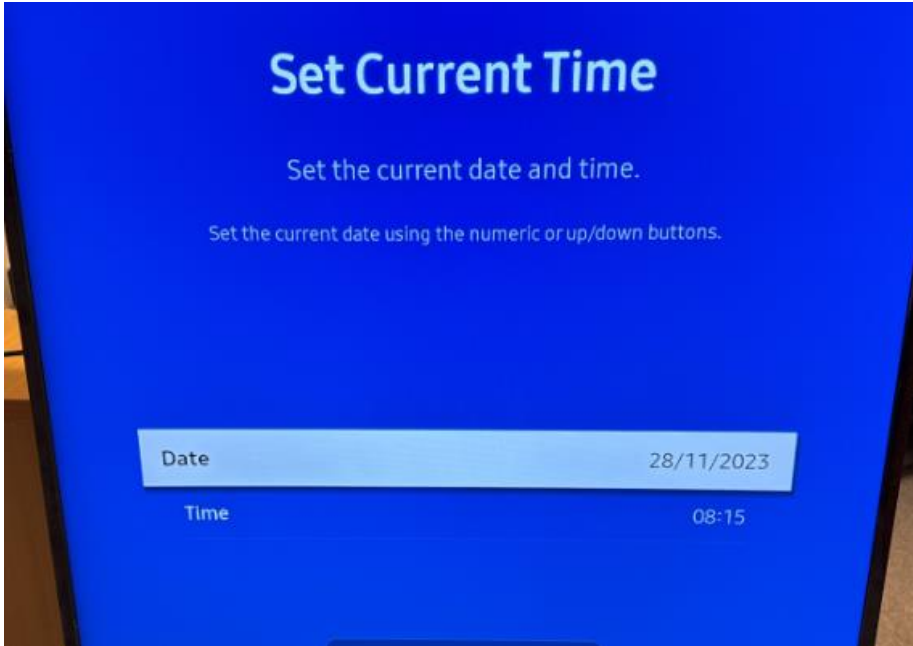

- Set new screen PIN or keep the default.

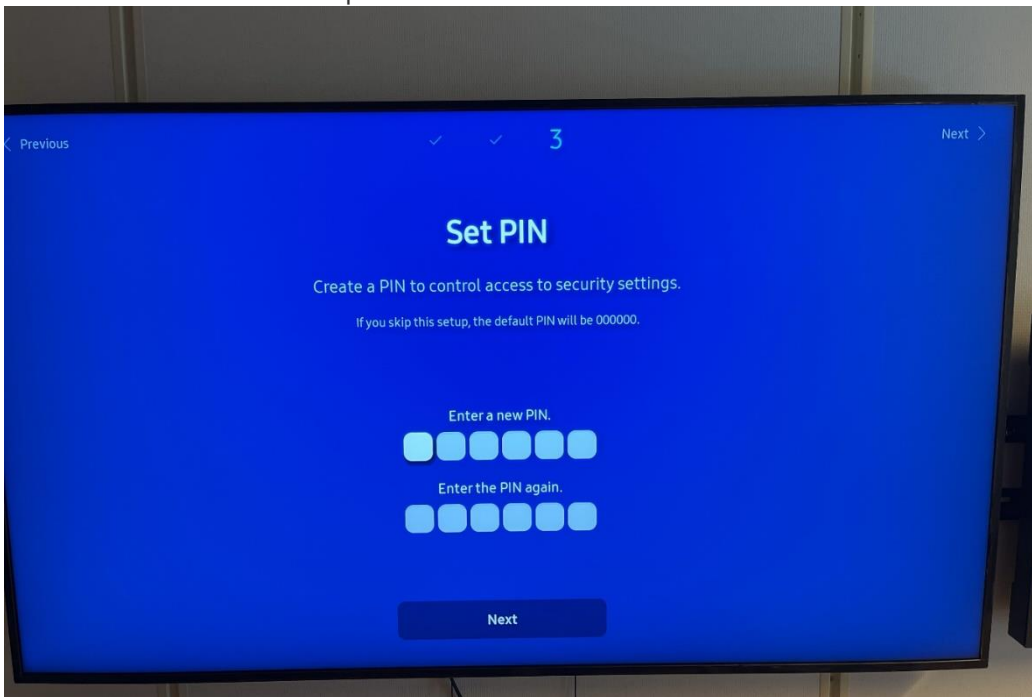

- First time installation guide complete




### 3. Install/Configure

Menu button on remote → System → Time → DST. Set DST to "On" and set start and end date correctly.

Settings for Norway:

Start date: Last Sunday in March at 2.00 am.

End date: Last Sunday in October at 3.00 am.

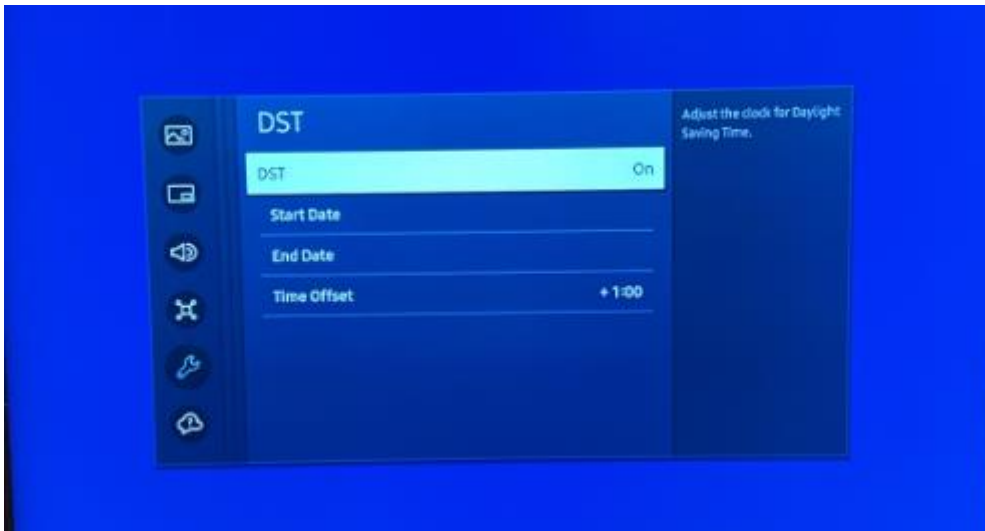

Menu button on remote → System → Power Control. Set the settings as shown in the picture below.

Auto Power On → ON

Standby Control → OFF

Remote Configuration → ON

Power Button → POWER ON ONLY





Menu button on remote → Picture → Advanced Settings.  
Picture Enhancer → OFF




Home button on remote → Favourites. Then choose "Settings".




Double-check that the App Management settings are shown correctly as below.




Home button on remote → Settings → On/Off Timer.

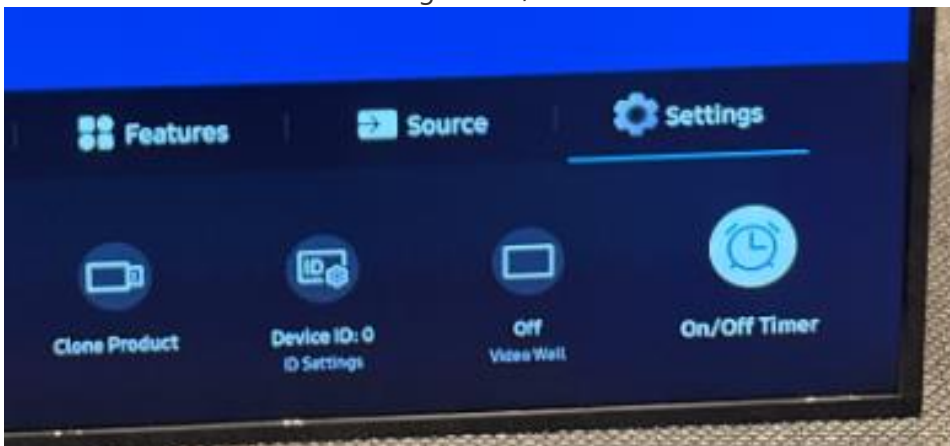

Set On Timer 1 as shown in the picture below. Adjust weekdays and time as needed, but remember to always set Source = Custom App.

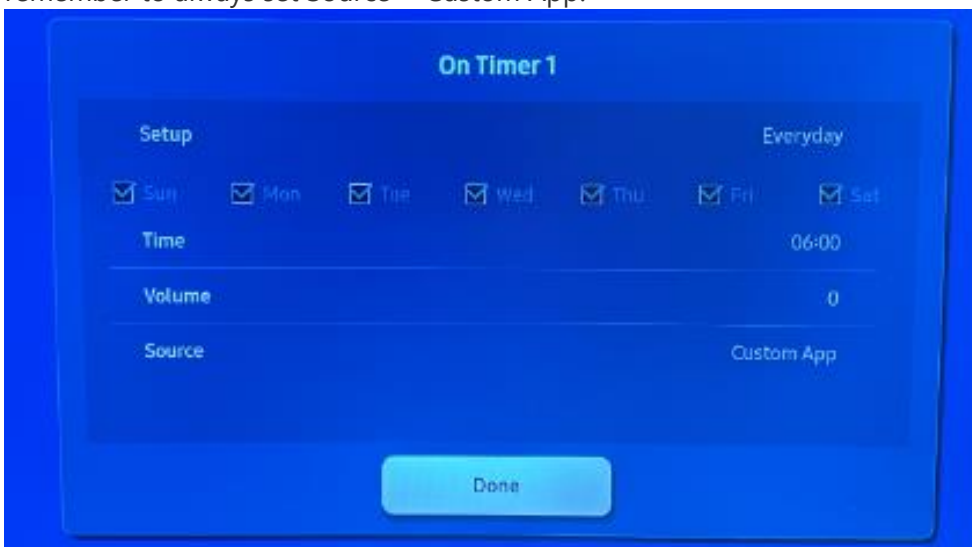

Set Off Timer 1 with adjusted times as needed.

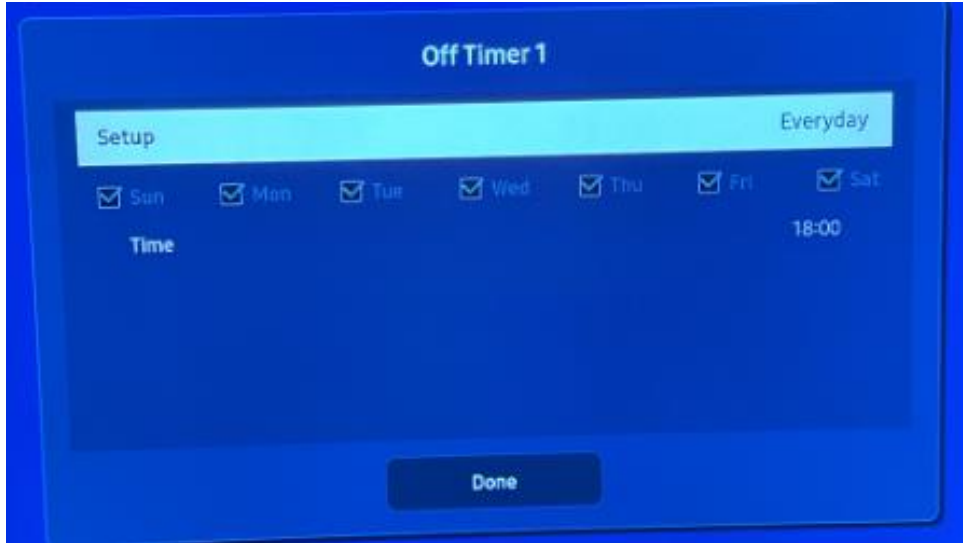

Home button on remote → Favourites. Then choose Custom App/LoopSign (which is always the left-most alternative in the bottom horizontal menu).




The LoopSign app will start and show the screen's hash code. To show content LoopSign, the code needs to be paired with a LoopSign screen on your account.



#### 4. Configure LoopSign to connect to your screen

- Select screen settings in your LoopSign console

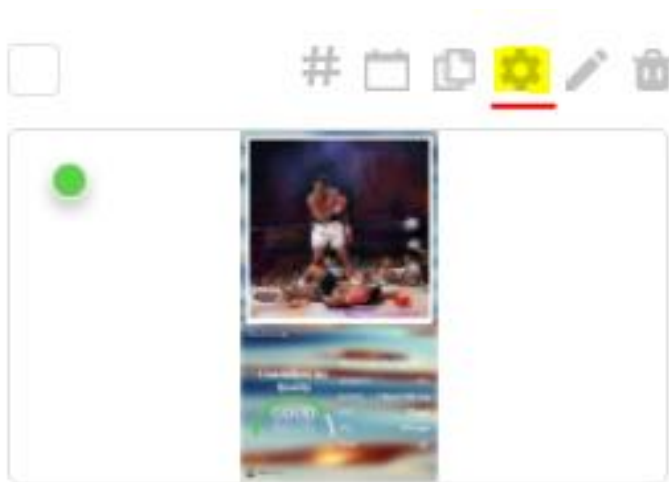

- Enable Samsung Tizen LoopSign player and enter the HASH code

## Edit Screen ✕

SCREEN NAME

UNIQUE SCREEN LINK

GROUP OF SCREENS

IP ADDRESS

Signage OS

Samsung Tizen LoopSign player

TIZEN HASH

 ✕