

Samsung - LoopSign Deployment Guide

There are two ways to deploy LoopSign to your Samsung screen. The preferred deployment method is with the built in WEB browser. However, in some cases use the SignageOS Samsung application.

Please note that the URL browser on Samsung screens are not always compatible with all kinds of content (Depending on model and firmware) So please make sure you have the latest firmware – check with your reseller.

If you use the SignageOS application you will get much better performance when playing MP4 files, however the WEBSITE Widget is not supported.



Content

1. General settings.....	2
1.1 Set Automatic Schedule on/off	2
2. WEB browser deployment (Recommended).....	2
3. Samsung Tizen (F-line, H-line, Q-line, N-line).....	3
3.1 SignageOS App deployment	3
4. Configure SignageOS APP	5

1. General settings

Initially you must make sure you have configured correct time zone, time/date and automatic on/off schedule. Correct time/date is essential for LoopSign. Please refer to your operating manual.

1.1 Set Automatic Schedule on/off


It's highly recommended to configure automatic on off according to your needs.

To shut down the screen when it's not needed will prolong its lifespan. Even if you require your screen to be on 24/7, schedule a short on/off each night (For example off 02:57 and on 03:00) This to give your screen a daily reboot.


Please refer to your operating manual for configuration of automatic schedule on/off.

2. WEB browser deployment (Recommended)


- Press "Source" on the remote and select "WEB browser"

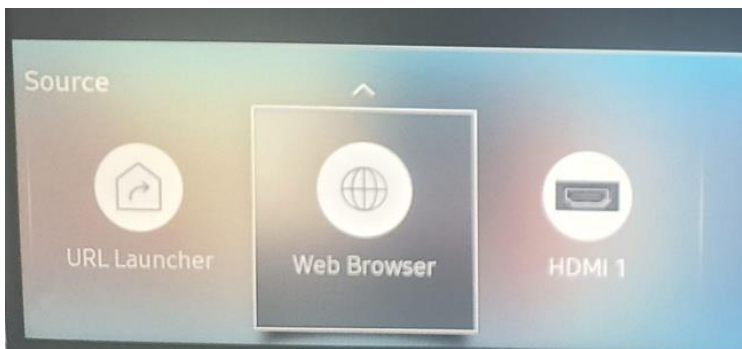

- Press arrow up on the remote and select "Refresh Options"

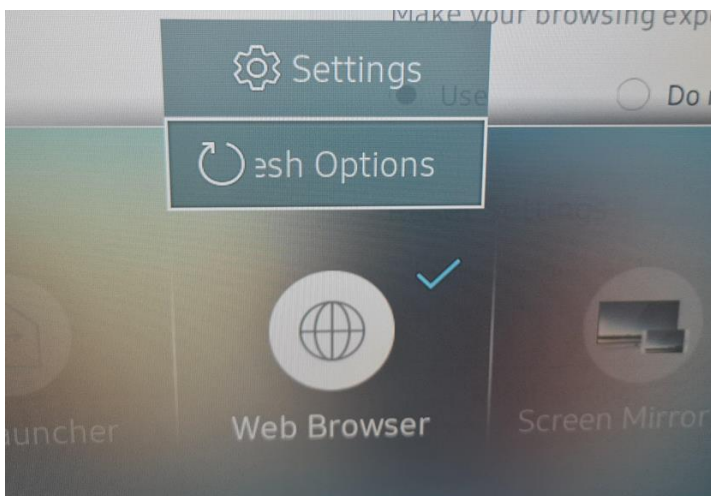

- Set Zoom to 100%
- Set Homepage Custom
- Set your screen URL as custom homepage <https://play.loopsign.eu/app/xxx/xxxxxx>

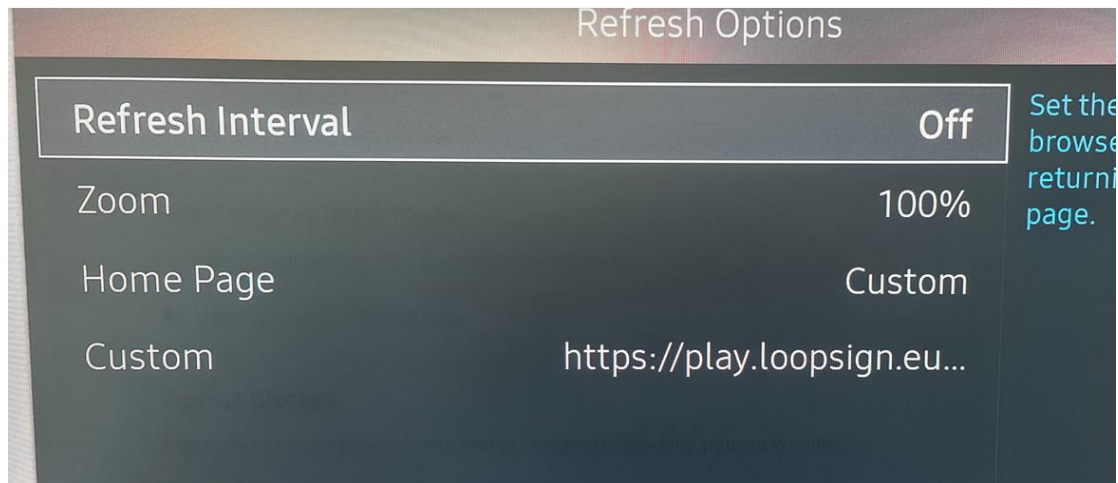

3. Samsung Tizen (F-line, H-line, Q-line, N-line)

3.1 SignageOS App deployment



If the screen has been previously used, we recommend loading factory defaults.

- Turn off the screen with the remote
- Press MUTE – 1 – 8 – 2- POWER ON with the remote control
(The screen will now after a few seconds boot in «root» mode.)
- Select «Options» in the menu and then select «Factory Reset» two times

Configure the screen




- Turn on display, go through basic settings (clocks, WiFi settings etc.) and switch source to HDMI or PC
- Press Menu -> System -> Play via
- Select URL Launcher
- Press HOME on remote control
- Go to URL Launcher Settings -> URL address
- Fill in following URL and confirm:
 - <https://t.signageos.io>

Select HOME and select – URL LAUNCHER

At this point, display should connect to the Internet and download signageOS App, screen reboot itself and start the LoopSign signageOS App.


If you successfully obtain the Verification hash and enter this into LoopSign screen settings.

Once the display is started with the signageOS App you will see a short Verification code in the middle of the screen.

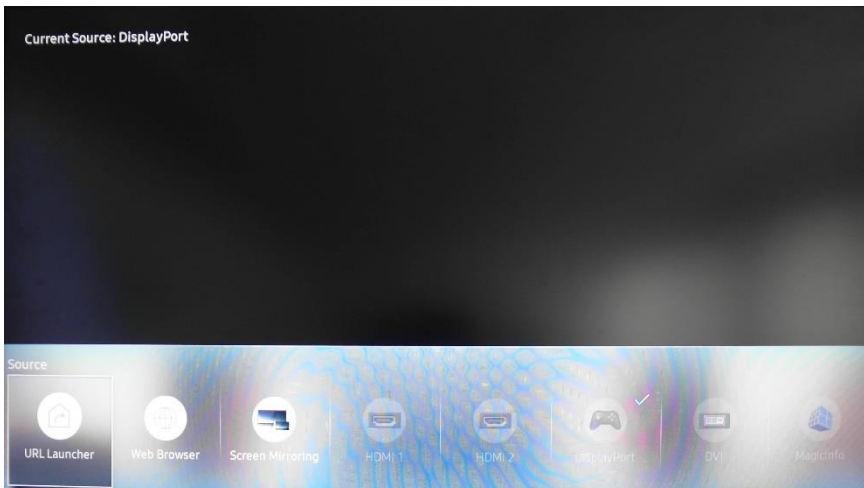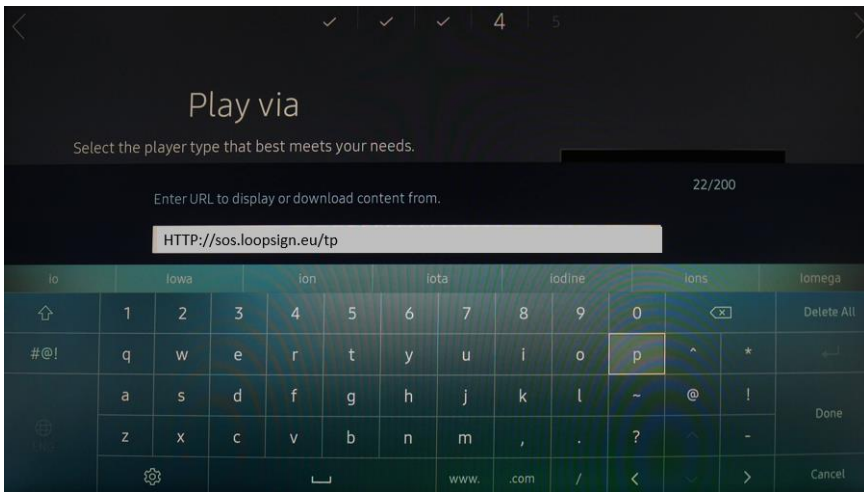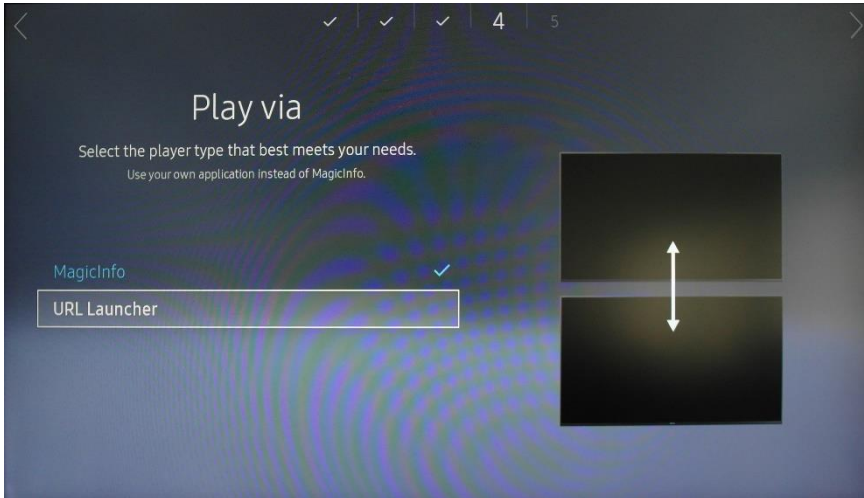


4. Configure SignageOS APP

When screen has started SignageOS App will show a 7 digit hash code.

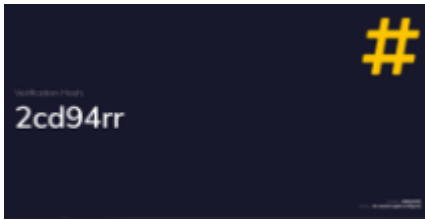

- Open your LoopSign Manage Screens - <https://edit.loopsign.eu>
- Press the “Settings” button on the LoopSign screen you want to be associated to the screen

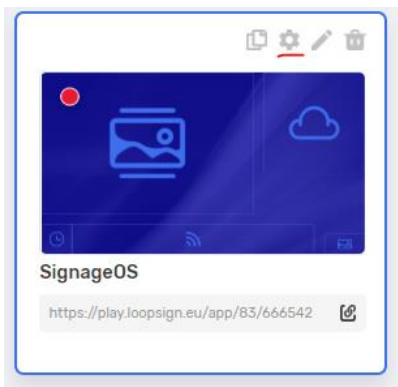

- Select SignageOS
- Input the hash code
- Press Save button

After a few seconds the screen will show the content of the LoopSign screen.