

Maxhub - LoopSign Deployment Guide

Deployment of LoopSign to your Maxhub display is very easy. LoopSign utilizes its Android app on Maxhub's custom Android OS to play content.



Connecting the screen to network/internet is not covered in this guide. Ethernet is always highly recommended, but wifi connections will usually work as well, given a strong and stable wifi connection.


Content

1.	Edit the ScreenShare settings.....	2
2.	Install the LoopSign player app	3
2.1	Enable unknown apps	3
2.2	Install the LoopSign Player app.....	5
3.	Set date/time, startup and schedule settings	7
3.1	Set date/time settings.....	7
3.2	Set automatic startup of the LoopSign Player app, and disable auto-off	8
3.3	Set automatic on and off for the screen.....	9
4.	Restart the screen	10
5.	Enroll the display on your LoopSign account	11

1. Edit the ScreenShare settings.

From the main menu, navigate to the ScreenShare app and press Enter on the remote. Inside the ScreenShare app, choose the cogwheel icon in the top right corner and press Enter on the remote. Disable all options in the pop-up menu and set *The passing code...* to *Hide*.

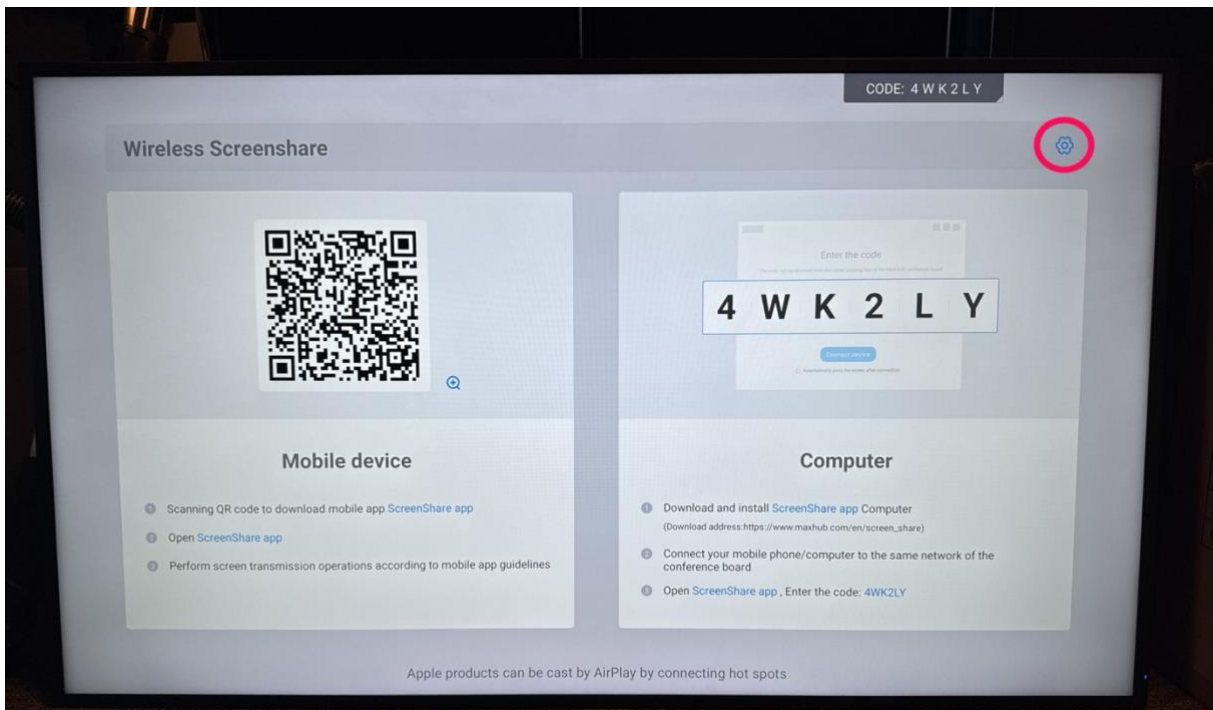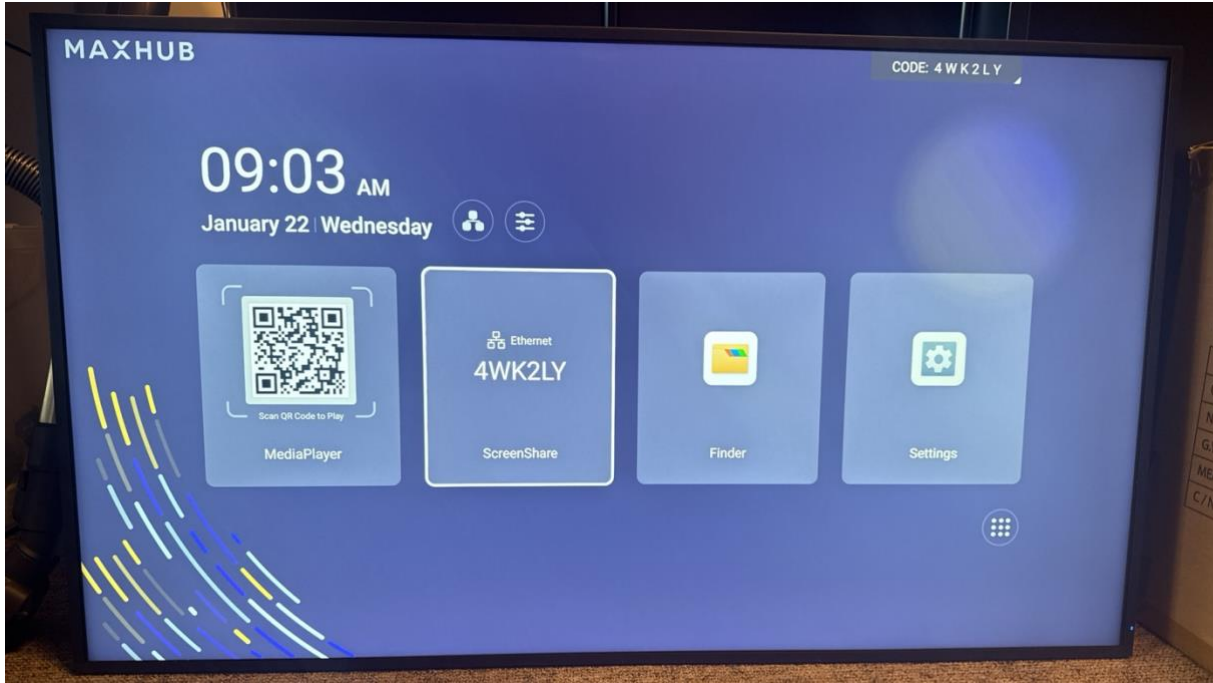



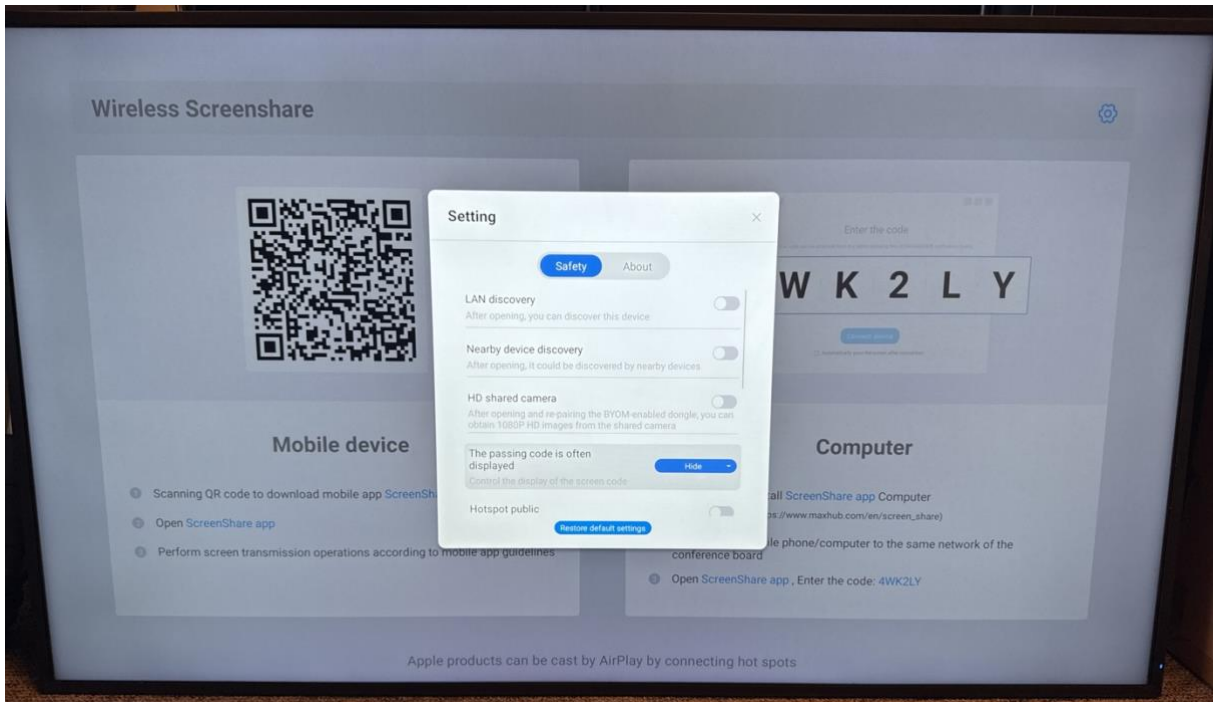


2. Install the LoopSign player app

2.1 Enable unknown apps

Go back to the main menu and open the Settings app. Then navigate to *System* and *Advance Settings* and then enable *Install unknown apps*.

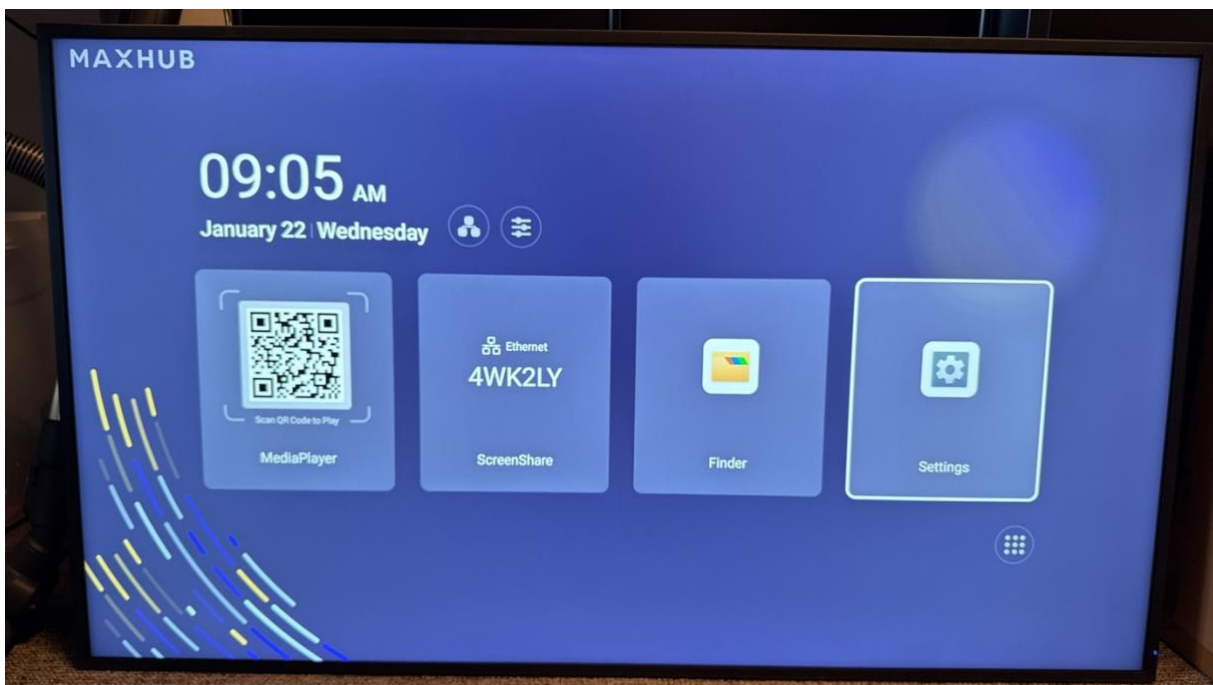

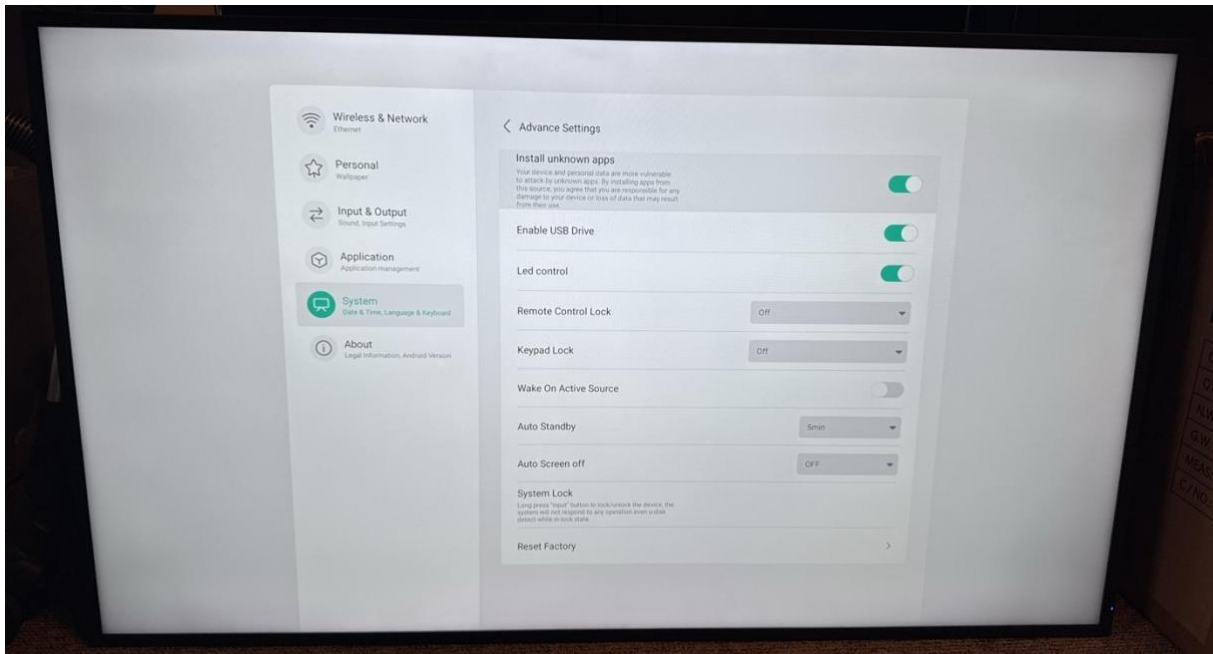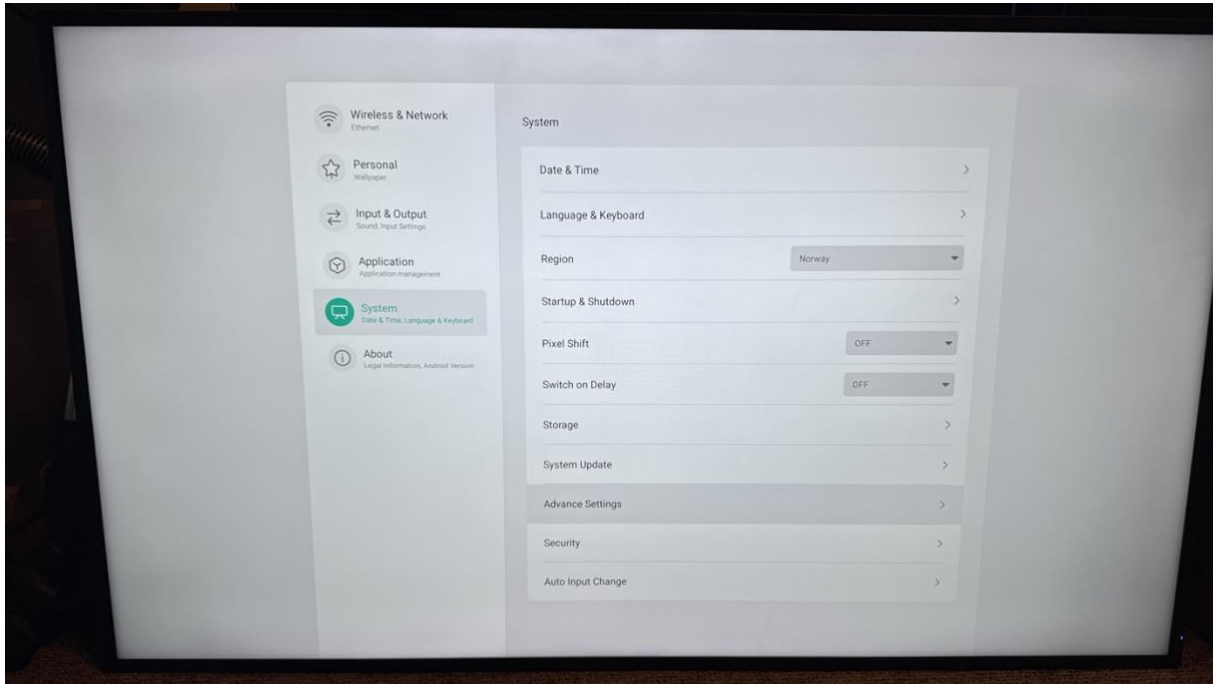


2.2 Install the LoopSign Player app

Download the LoopSign Player app either directly on the screen using the built-in browser or download it to your computer and put it on a memory stick (FAT32 recommended) which you can connect to the screen.

Download link: <https://loop24.no/lspdm.apk>

Open the Finder app from the screen's main menu, and from there find and install the LoopSign Player app file.





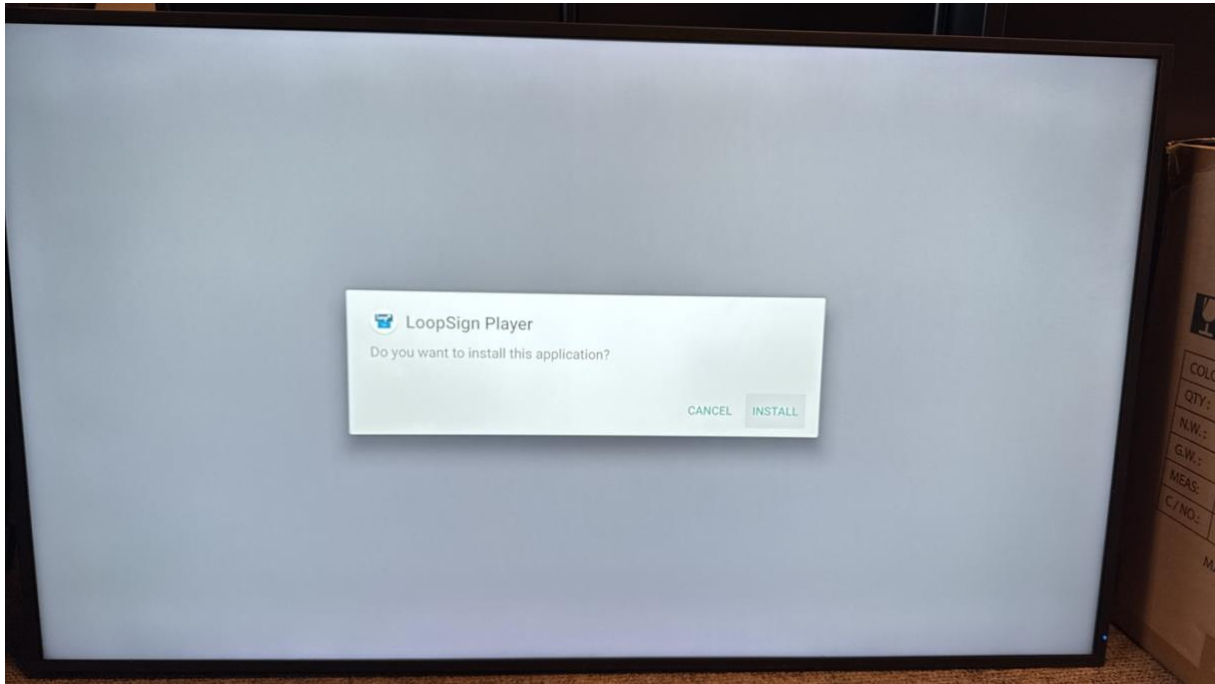


3. Set date/time, startup and schedule settings

3.1 Set date/time settings


Make sure that the date/time settings of the screen are correct. Open the Settings app from the main menu. Then go to *System, Date & Time* and then enable *Automatic Date & Time* and set the correct time zone. Back in the *System* settings menu, it is also recommended to set the *Region* correctly.

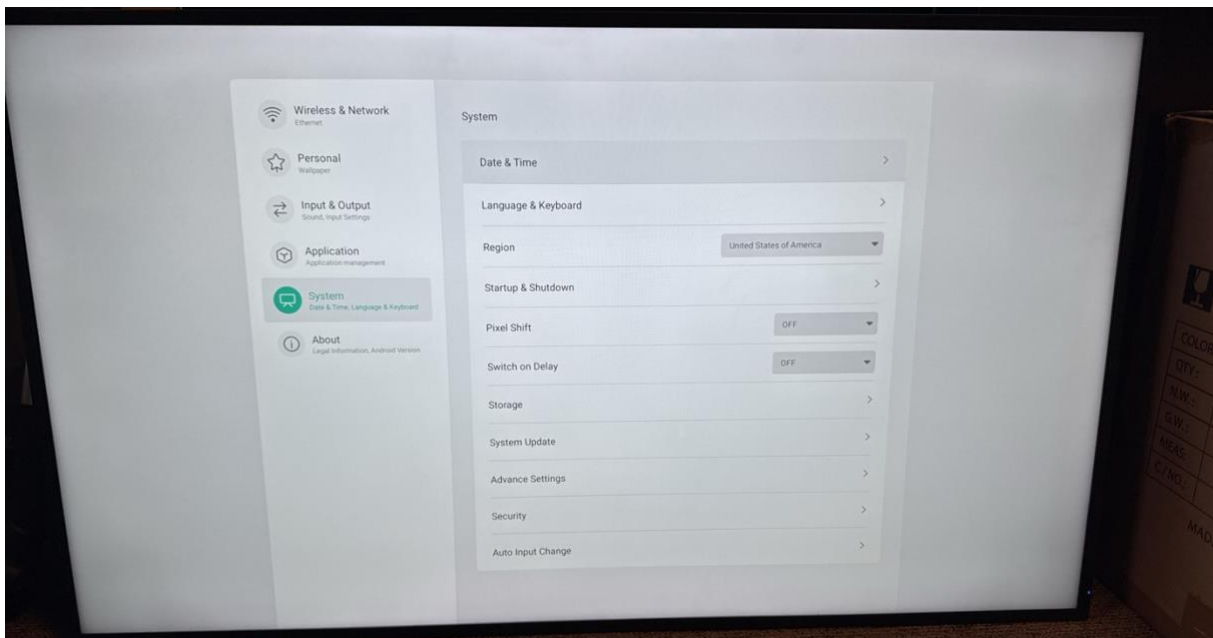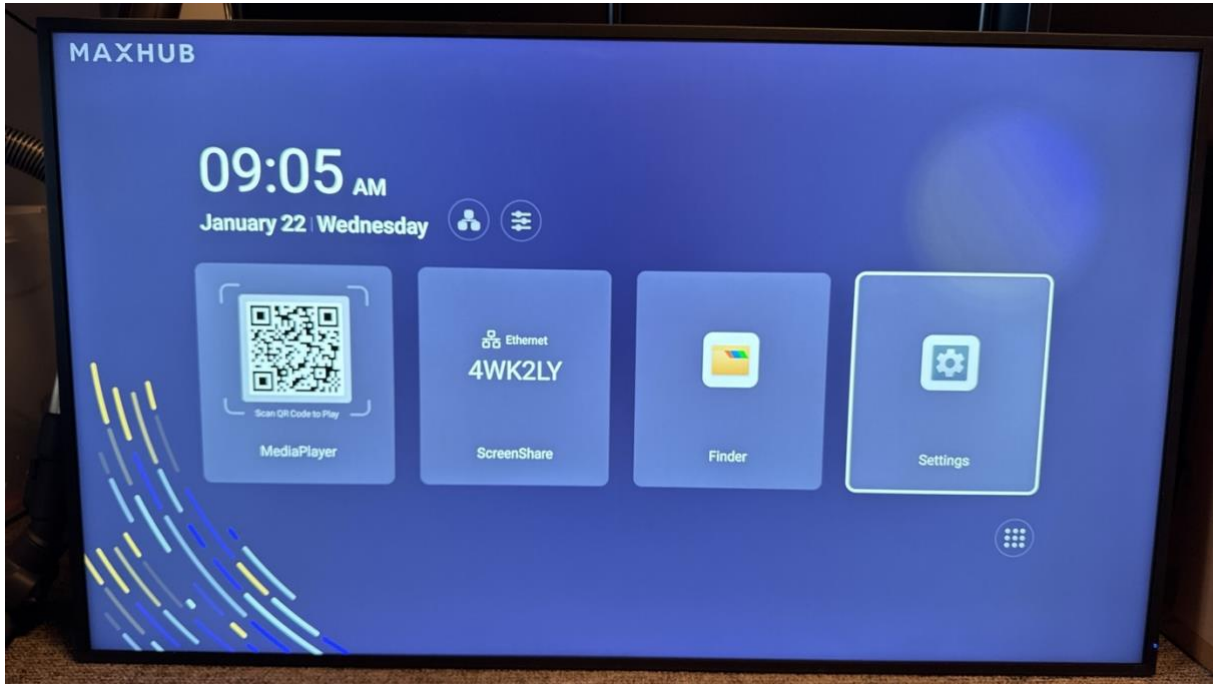


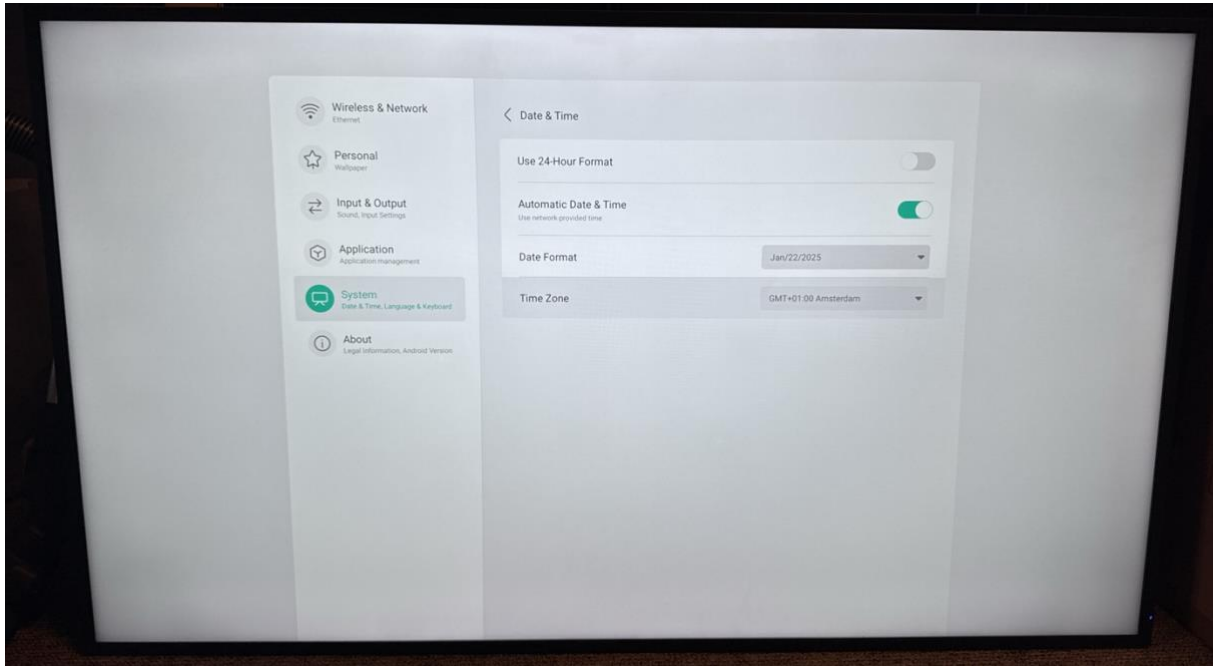

3.2 Set automatic startup of the LoopSign Player app, and disable auto-off


Still in the Settings app, go to *System*, then *Advance Settings* and then *Startup & Shutdown*. Here, set *Startup Channel* to *Android*, and then set *Default Startup Item* to the newly installed *LoopSign Player* app. Under *Energy Saving*, make sure to set *Auto Power off* to *Disable*.

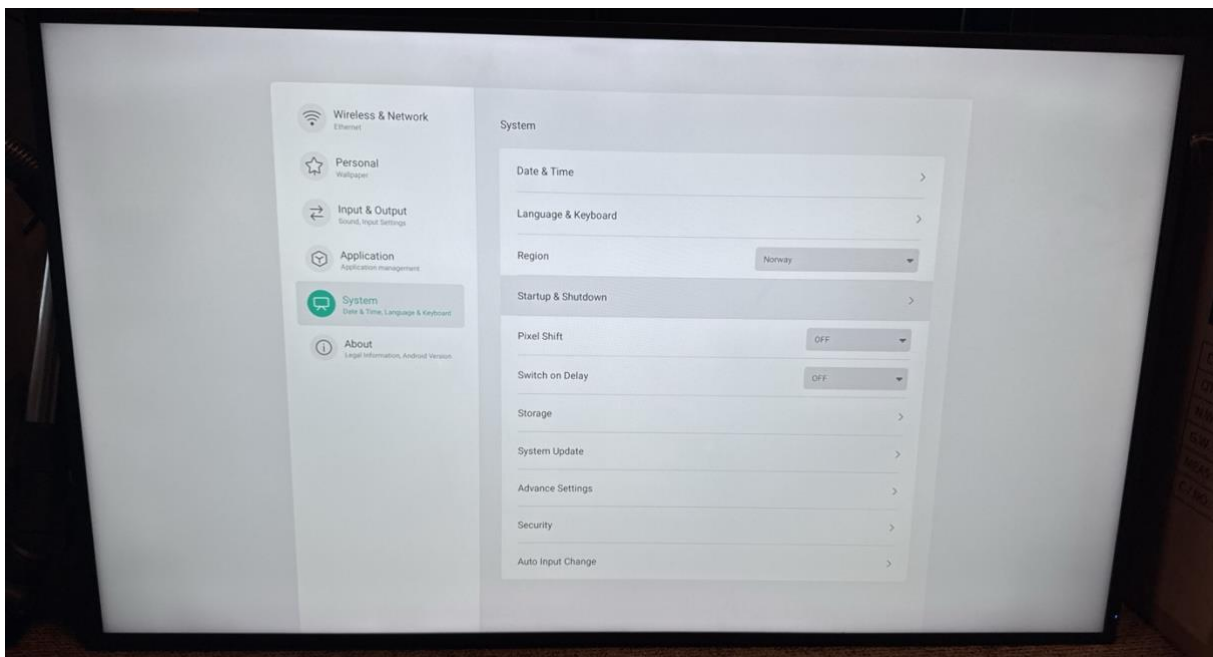

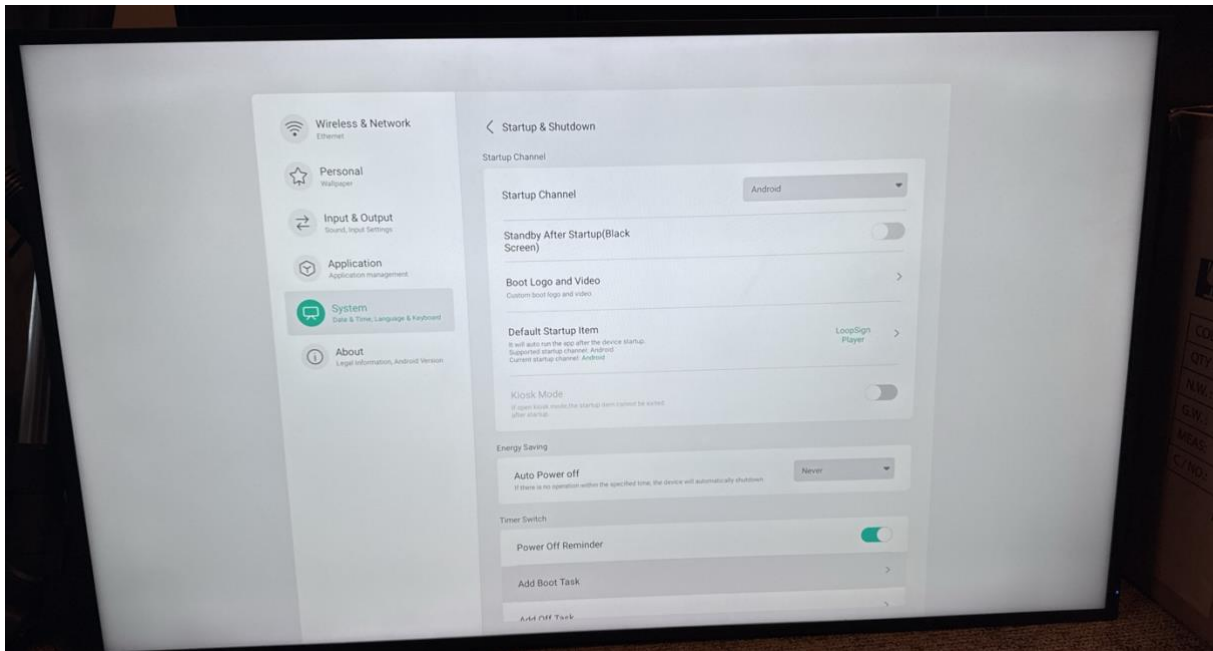

3.3 Set automatic on and off for the screen

The last step of the setup is to add your preferred times for when the screen should automatically turn on and off. In the *Startup & Shutdown* menu, choose *Add Boot Task* to define time(s) for when the screen should automatically turn on. Then choose *Add Off Task* to define time(s) for when the screen should automatically turn off.

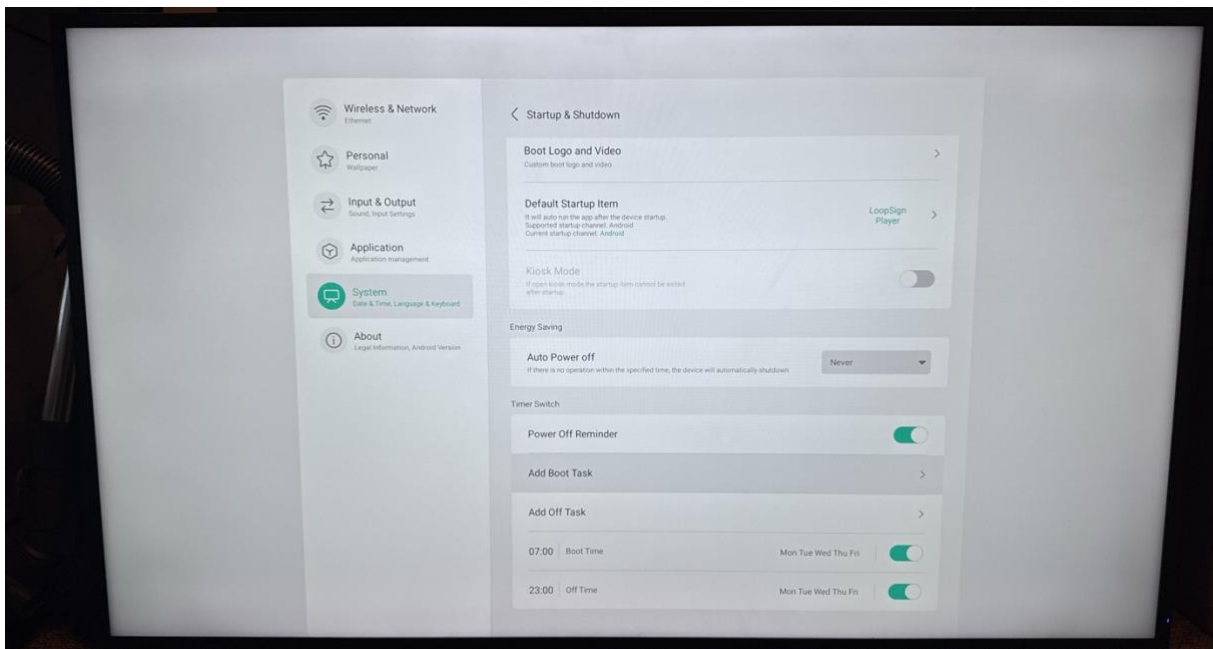



4. Restart the screen



Turn off the display completely by holding the remote's on/off button for about 5 seconds, and then turn it back on once it has shut down by giving the same on/off button a short press. Once the display has booted back on, the LoopSign Player app should automatically launch, and after a couple of seconds you will see the hash code that you can use to enroll your Maxhub display on your LoopSign account.





5. Enroll the display on your LoopSign account

Log in to LoopSign, and then click *Manage Screens*. After that, click *Devices* in the top menu. In the Devices overview, click *+Enroll* to add the display to your LoopSign account, using the hash code showing on the display. After that you can assign the display to a LoopSign screen to immediately have your display start playing your LoopSign content.

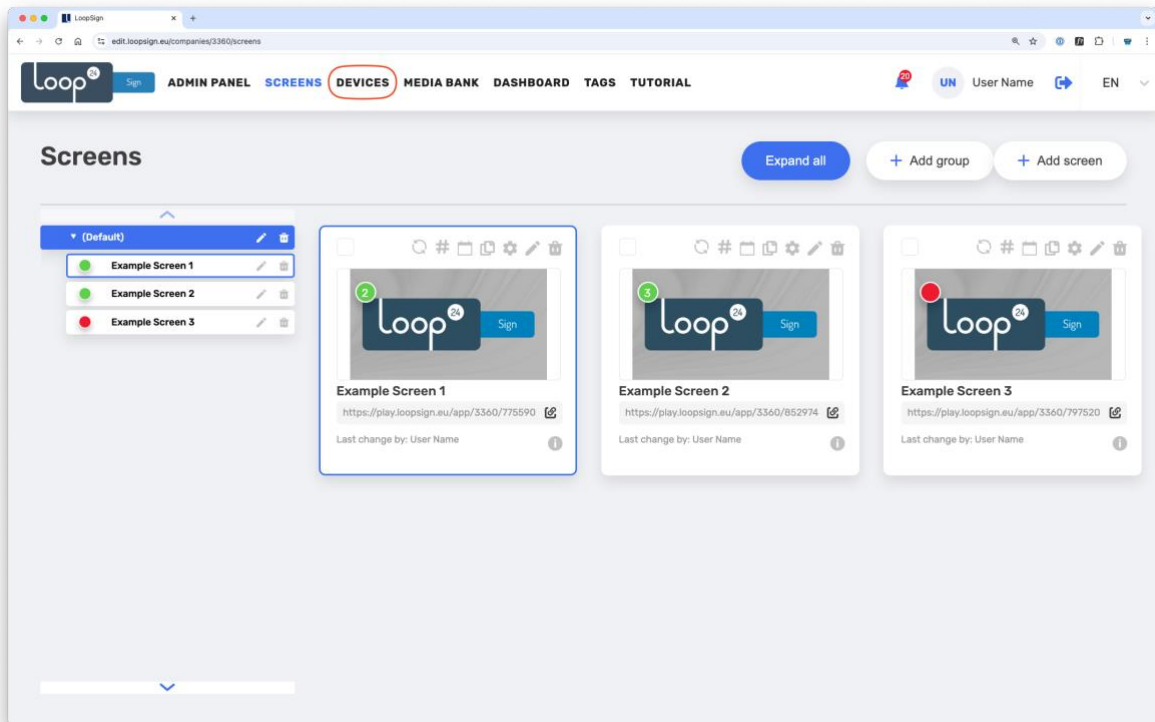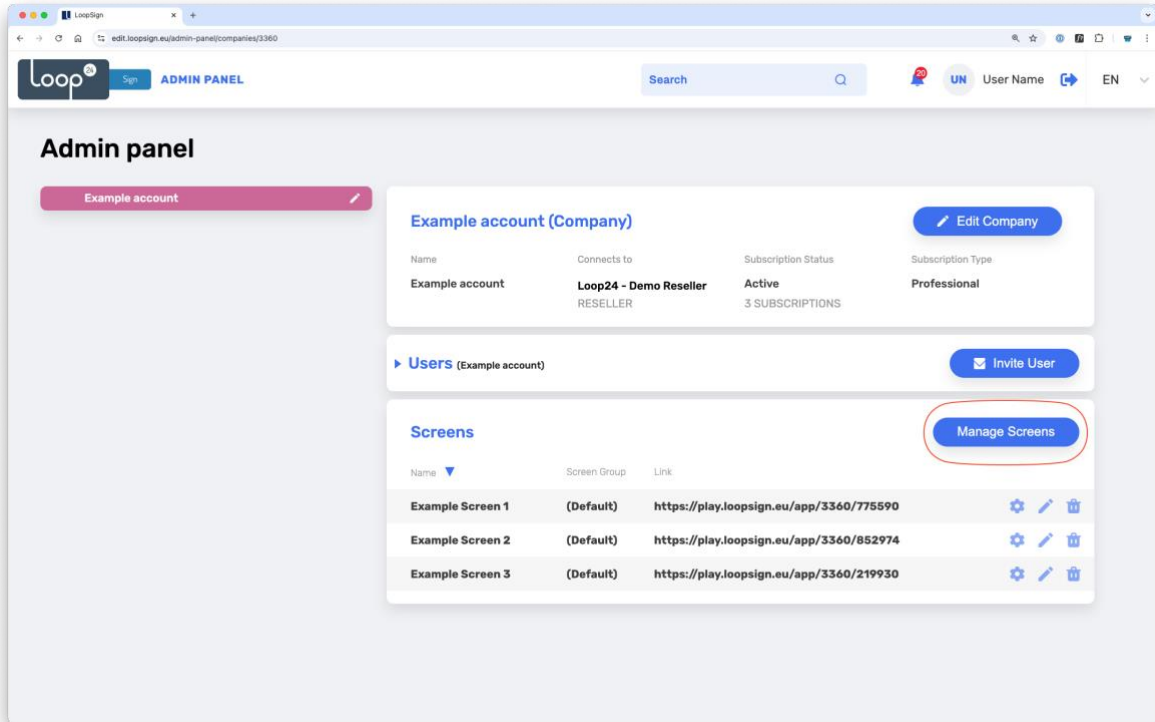

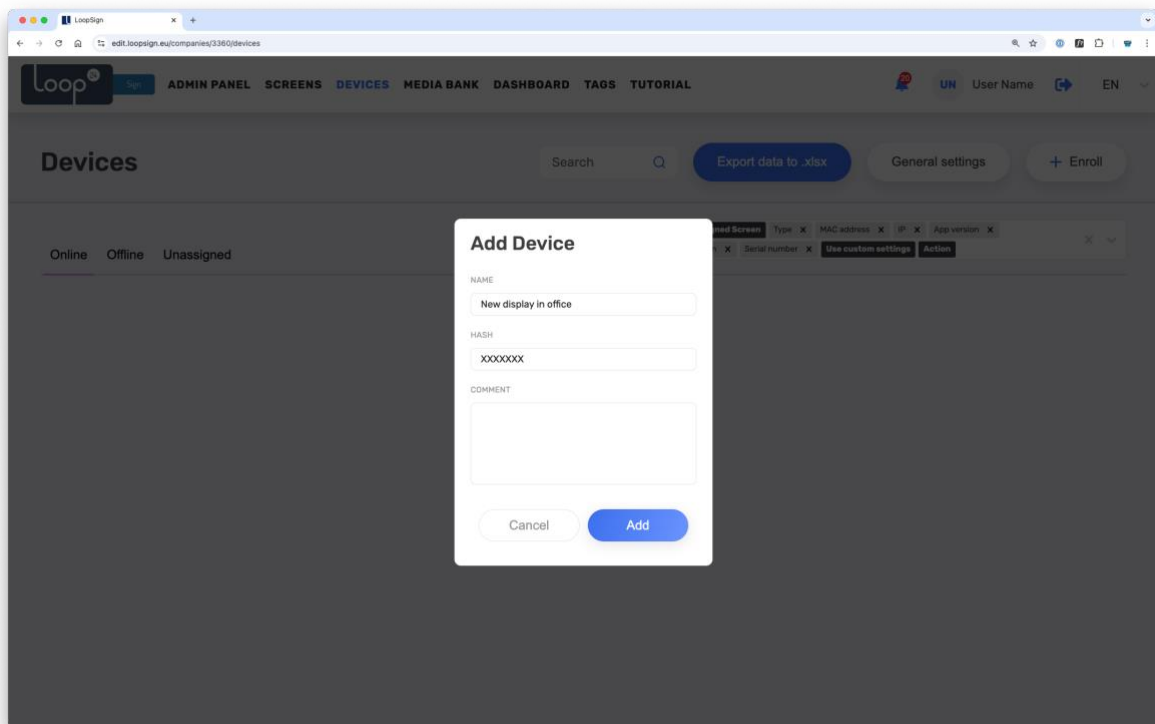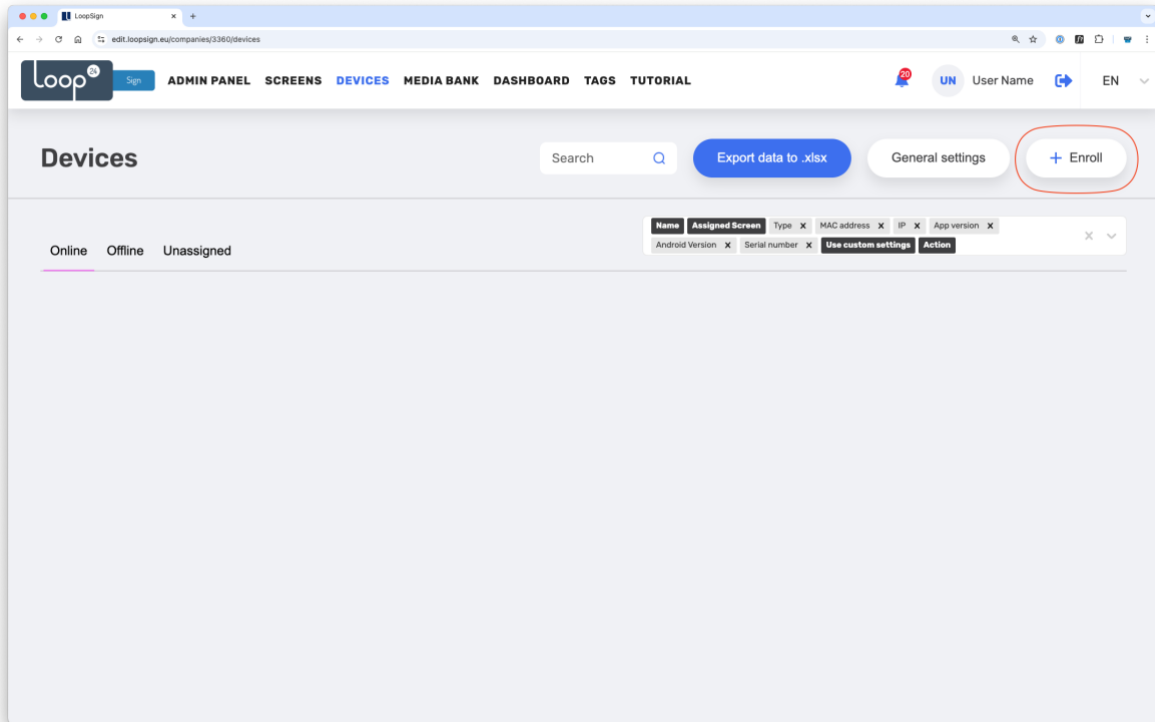

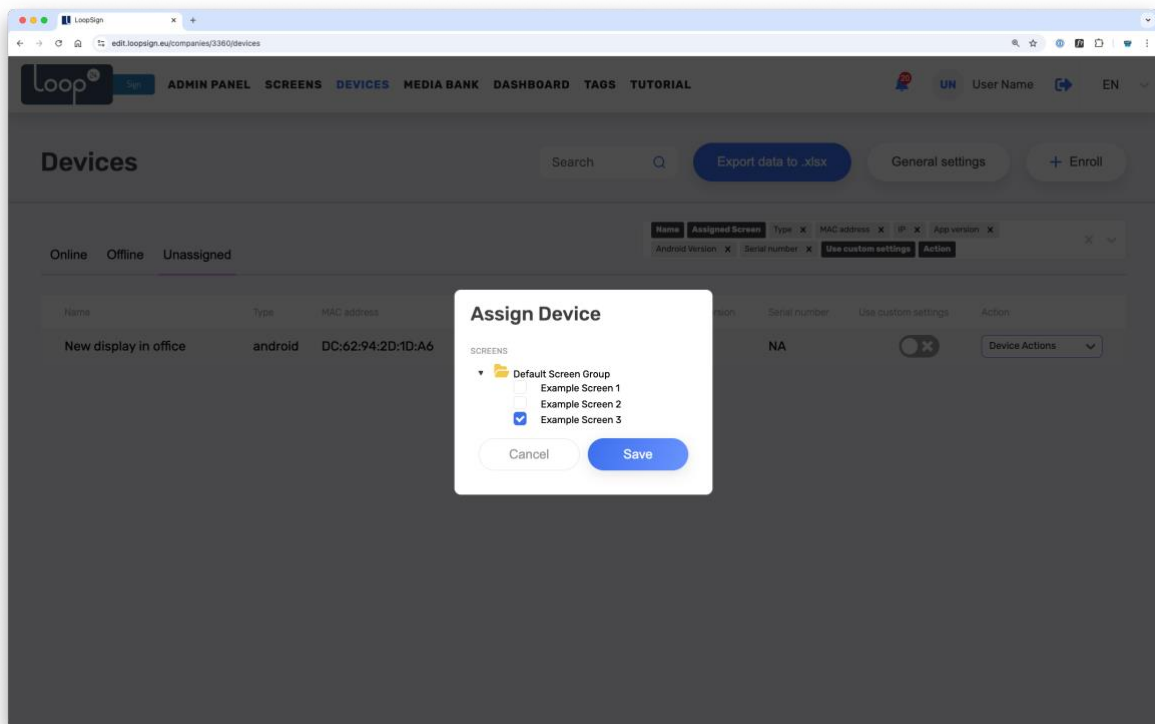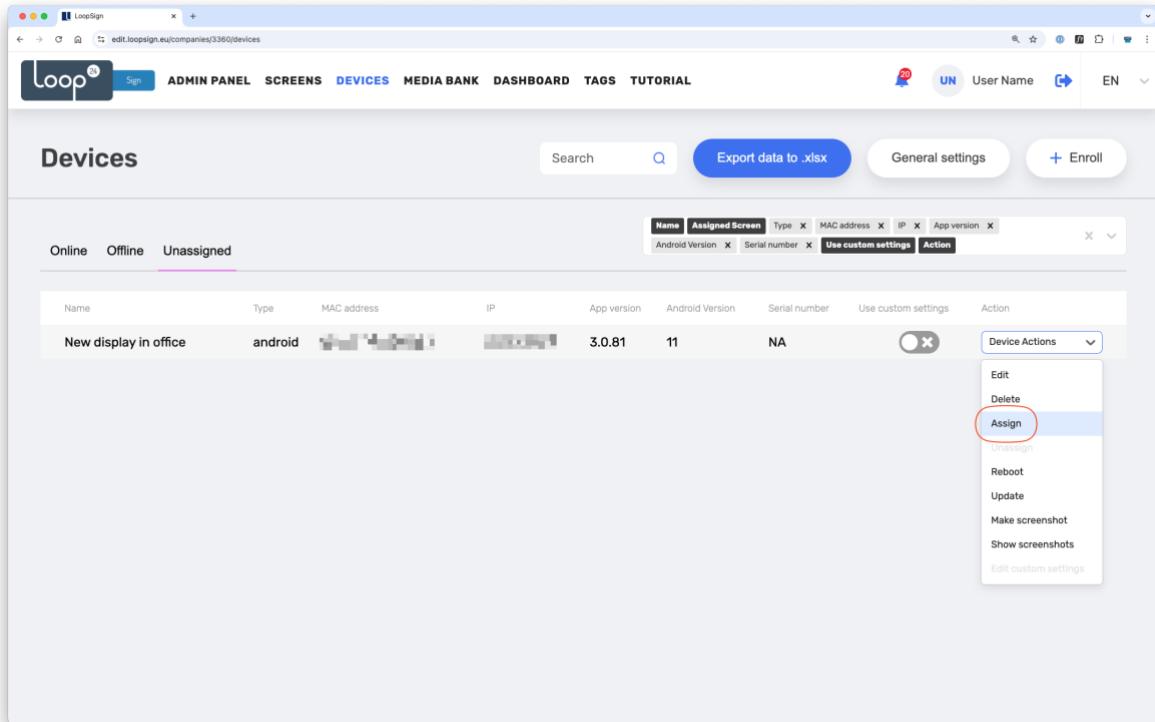

Congratulations! You've now successfully configured your display, enrolled it to your LoopSign account and assigned it to play content from a LoopSign screen.

