

How to install LoopMeeting on a IADEA / Meetio panel

1. Load the panel with a “fresh” firmware.

(This to make sure the firmware is without the Meetio application.)

Go to IADEA support page:

<https://support.iadea.com/hc/en-us/articles/900003536086-XDS-1078-Firmware-Android-7-1-OS>

Note: If you have a different Android version on your panel, please select the version that corresponds to the model you have.

Download firmware.

Upgrade instructions

- Download the latest firmware using Chrome or Firefox web browser and copy it onto root directory of an USB drive
- Power on device and plug in USB mouse to the device
- From Basic Settings menu, go to Advanced > System > Firmware Update. Insert USB drive to the device and do NOT remove USB drive until player reboots to the Basic Settings menu

NOTE:


If the Meetio software still is present on the panel, please follow these additional instructions.

1. Download the addon: [https://s3.us-east-1.amazonaws.com/download.us.iadea.com/support/add_on/addon-Neutral-Android7\(1.0.2\).pkg](https://s3.us-east-1.amazonaws.com/download.us.iadea.com/support/add_on/addon-Neutral-Android7(1.0.2).pkg)
2. Prepare a USB pen drive in FAT32 format. Put the downloaded .pkg file into the root directory (make sure that there is only 1 .pkg file to avoid conflict)
3. Plug the USB pen drive onto the device
4. On the device, navigate to the Android settings app and find [System] > [Update] > [Manual through USB]
5. Installation will start and it will reset the device automatically

2. Configure the panel


<https://loop24.no/lmoem.zip>

- Unzip the .APK file and copy it to a USB stik (Use the same as you used for the firmware update)
- Plug in the USB stick in the IADEA panel.
- Start IADEA the panel
- Select «Advanced»

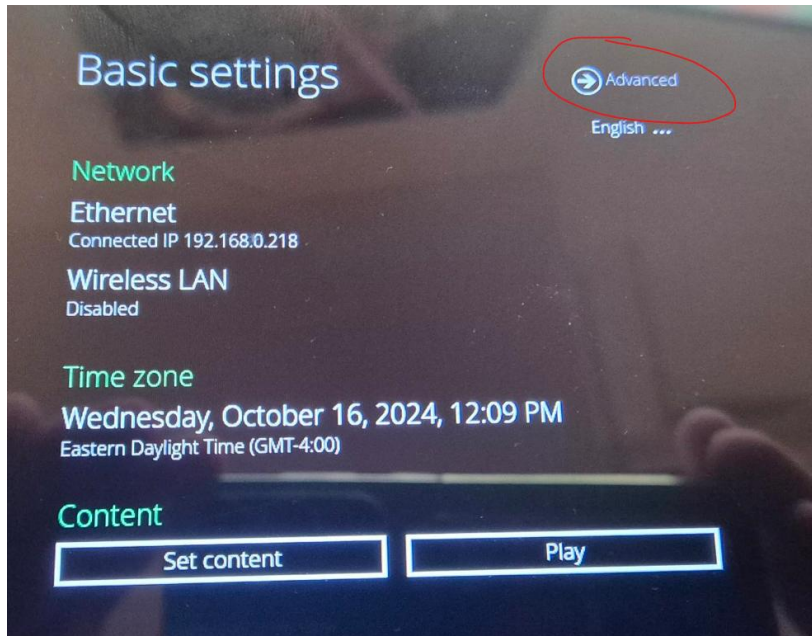


- Press on the «Time Zone» area

Set correct timezone, enable “24-hour format” and «Automatic date & Time»

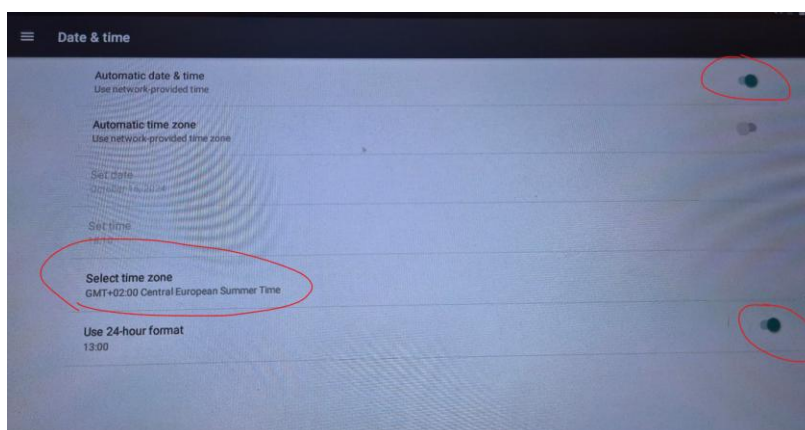


Go back by pressing the «Arrow back» in the bottom menu


Then, from this picture drag finger from top and down and press the USB icon

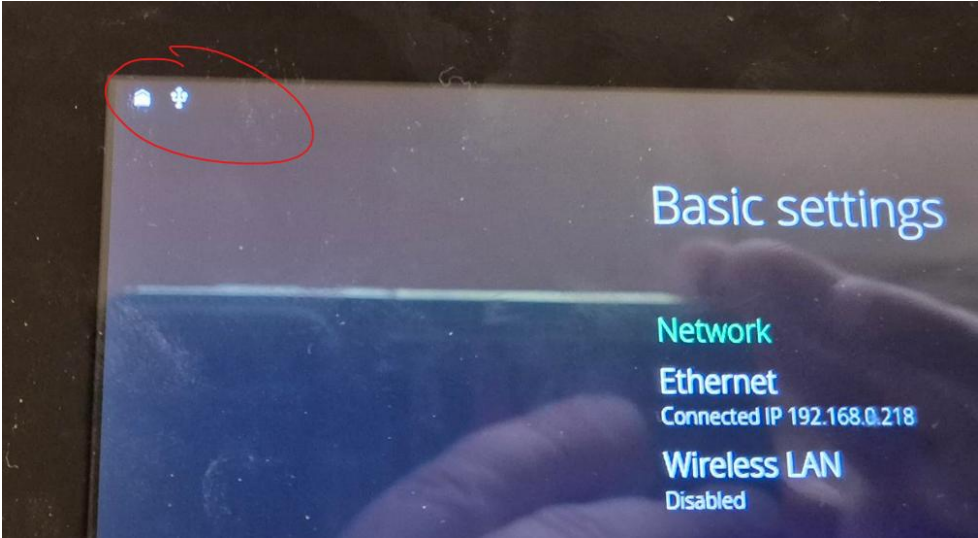

Select your USB drive

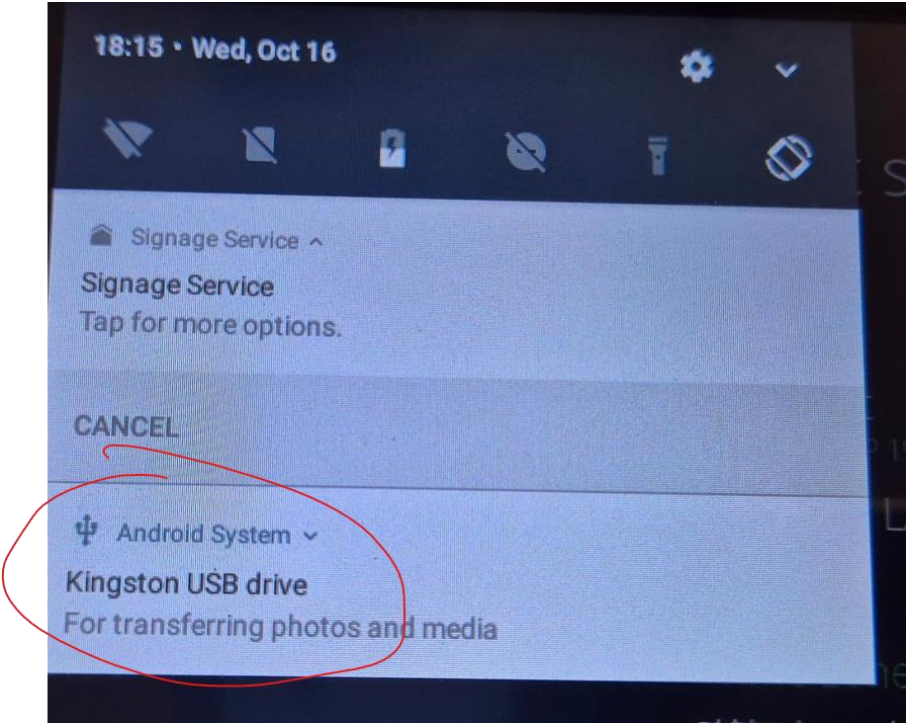


Find and select the LoopMeeting APK file

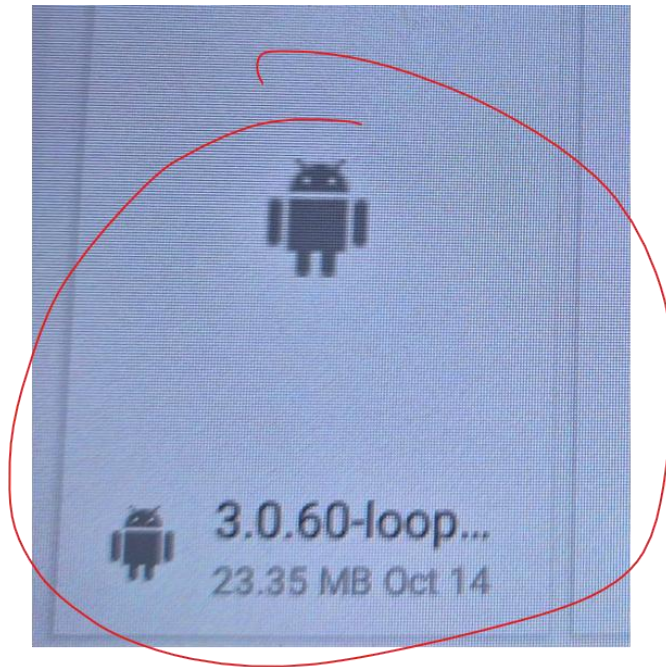


Confirm that it accepts to be installed from «Unknow sources» and select the file again to install.

Important: When the file is installed, select «Open» Then it will set important basic settings

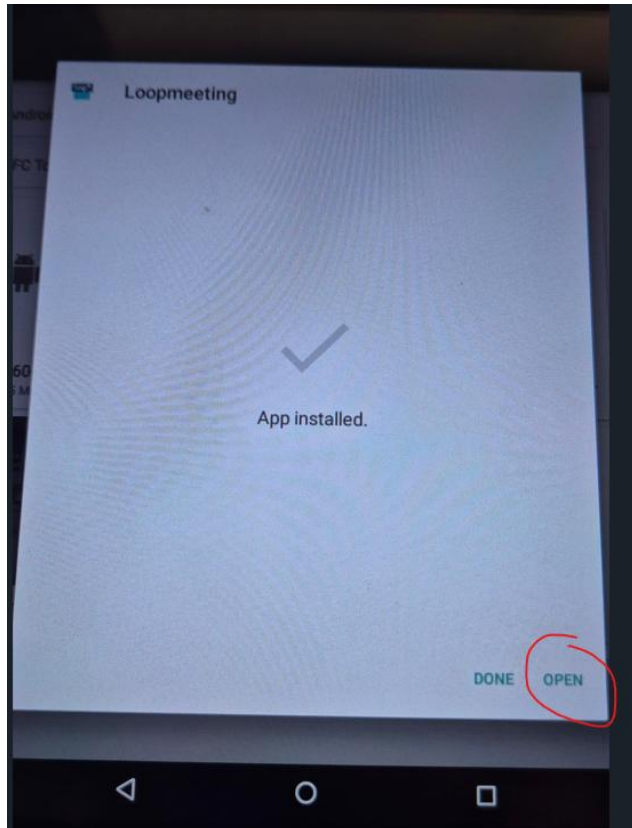


Exit the app / restart the panel so come back to the default start screen.


Then select “Advanced”

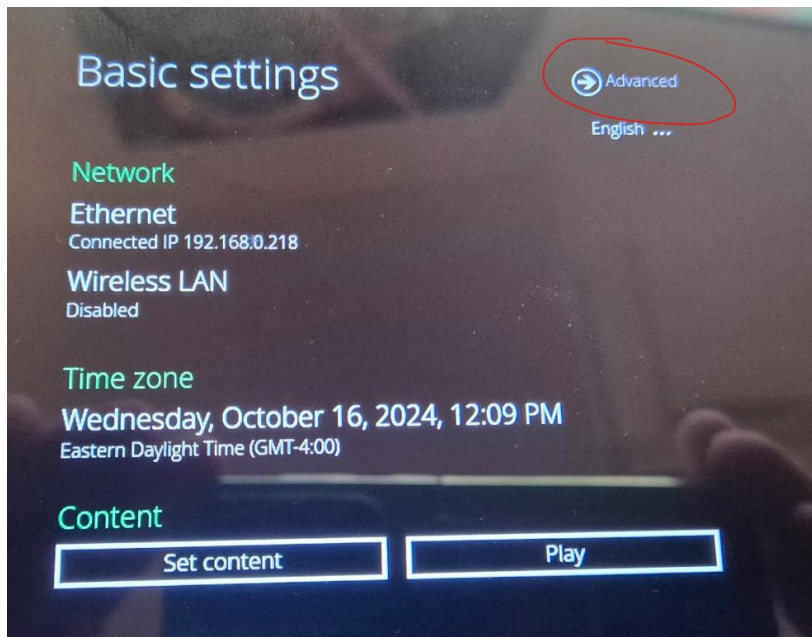

Then select “Content” then select “App Start

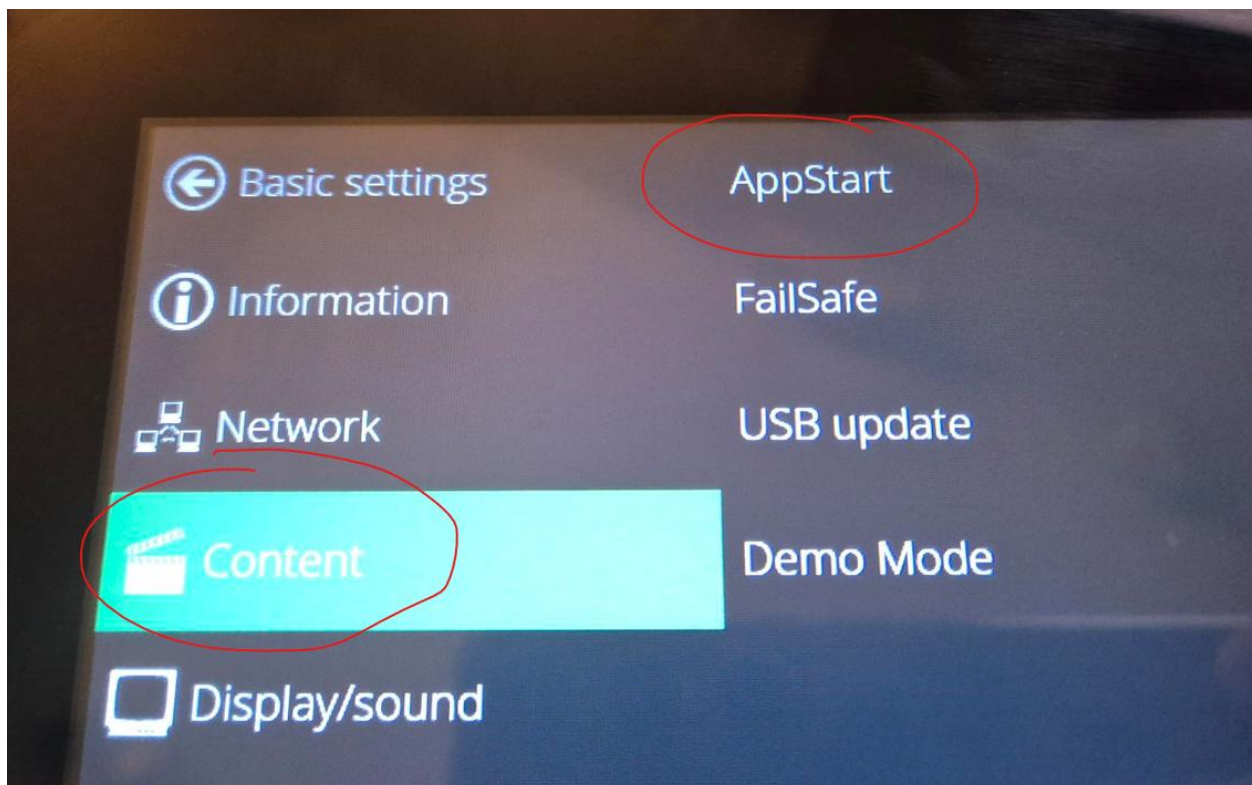


Then write in exactly as shown below.
 (This will make sure the app autostarts in “kiosk” mode.)

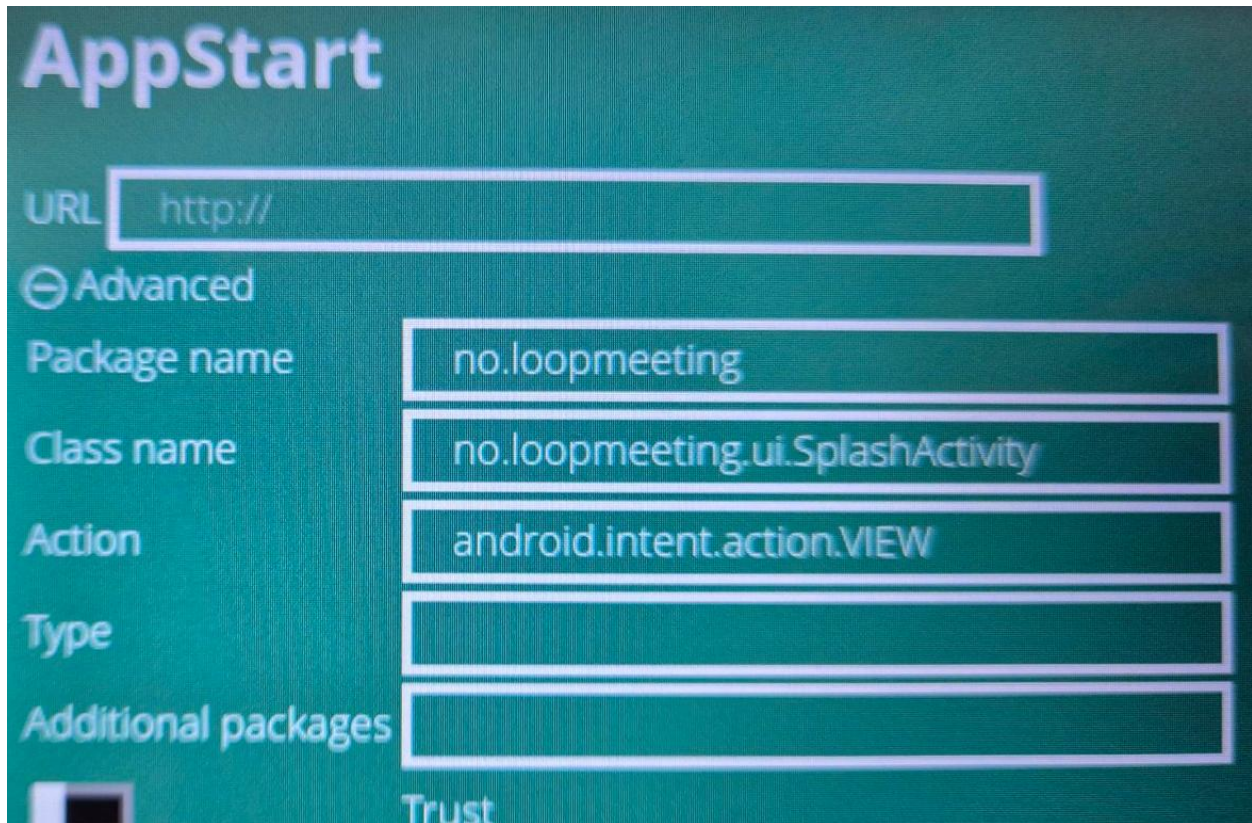

Package Name: no.loopmeeting
 Class name: no.loopmeeting.ui.SplashActivity
 Action: android.intent.action.VIEW

Scroll down and Press “Set” in bottom

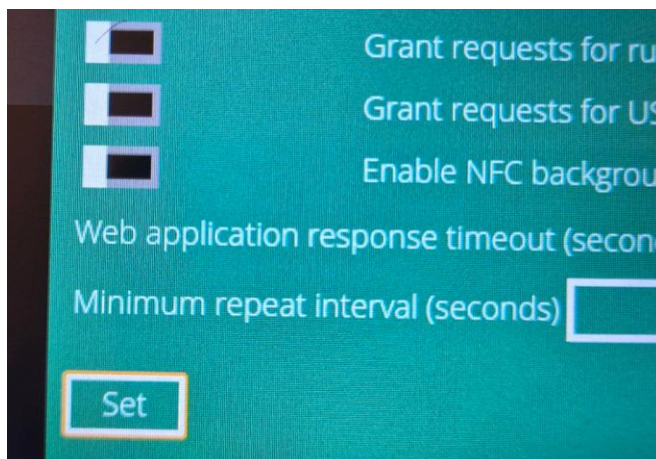

Press menu item “Play”

It should now briefly say “Screen pinned” and it should start LoopMeeting app.

