

Hikvision - LoopSign Deployment Guide

Deployment of LoopSign to your Hikvision display is very easy. LoopSign utilizes its Android app on Hikvision’s custom Android OS to play content.

Connecting the display to ethernet is always highly recommended, but wifi connections will usually work as well, given a strong and stable wifi connection.

Content

- 1. Dismiss/disable FocSign..... 2
- 2. Connect to network..... 2
- 3. Install the LoopSign Player app 3
 - 3.1 Install the LoopSign Player app 3
 - 3.2 Set LoopSign Player to run at startup 4
- 4. Set date/time and schedule settings..... 5
 - 4.1 Set date/time settings..... 5
 - 4.2 Set scheduled on/off of the display 5
- 5. Open the LoopSign Player app 6
- 6. Enroll the display on your LoopSign account 7


1. Dismiss/disable FocSign

After turning on the display for the first time, a notification will pop up asking to activate FocSign. Check the "Ignore" checkbox and click "Next Time".



2. Connect to network

Connect to network (ethernet highly recommended) via the Settings app.

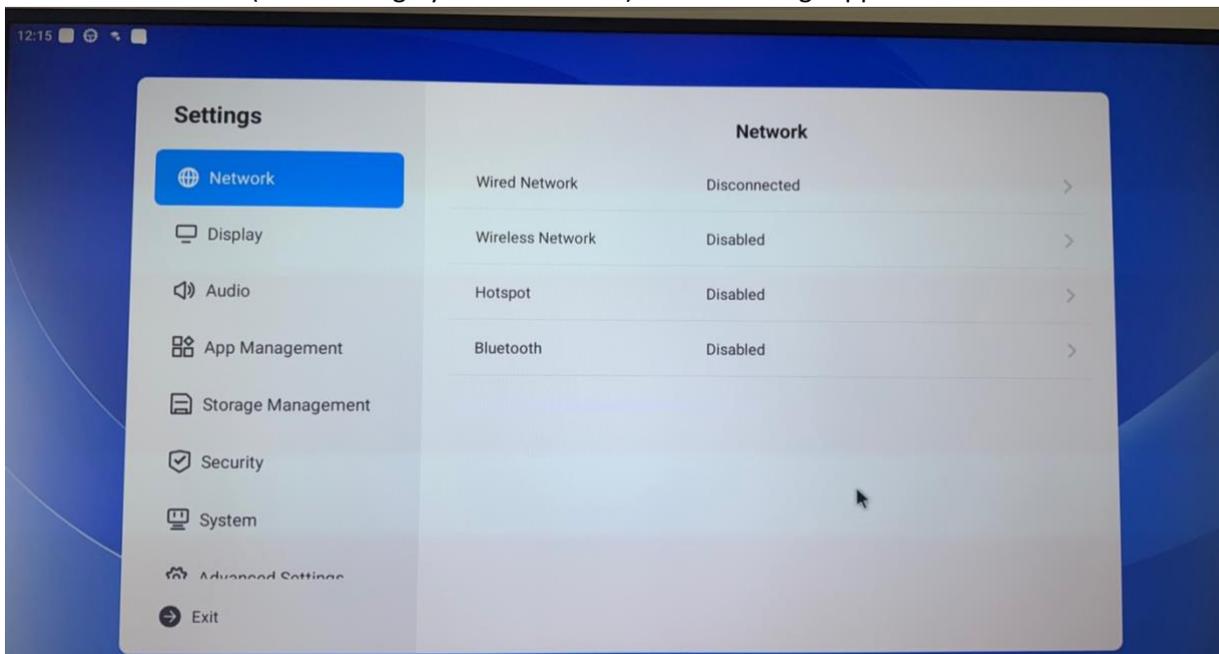


3. Install the LoopSign Player app

3.1 Install the LoopSign Player app

Download the LoopSign Player app to your computer and put it on a memory stick (FAT32 recommended) which you can connect to the screen.


Download link: <https://loop24.no/lspdm.apk>

Connect the memory stick to the display and use the FileBrowser app to navigate to and run the APK installation file. Click "Done" when finished.

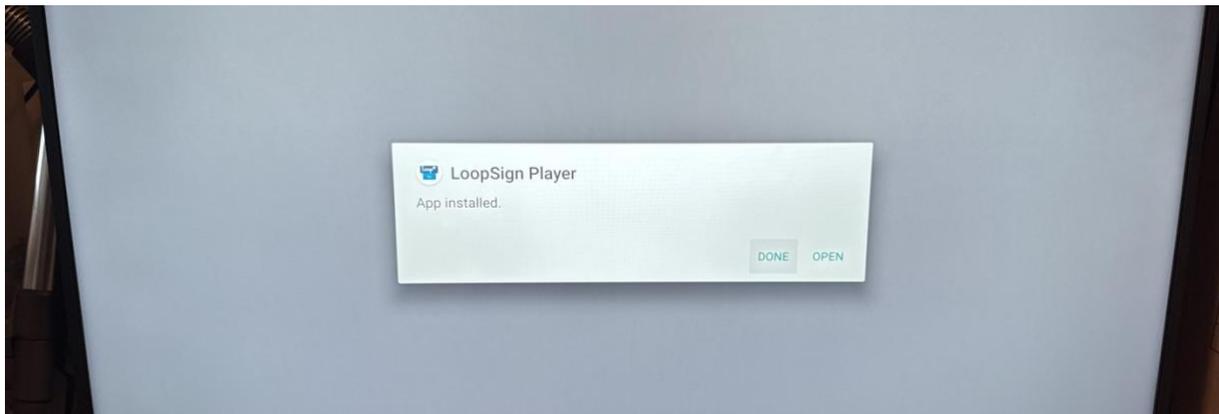

3.2 Set LoopSign Player to run at startup


Open the Settings app and go to “App Management” → “Run at Startup”. Activate “Run at Startup” and select “LoopSign Player”.

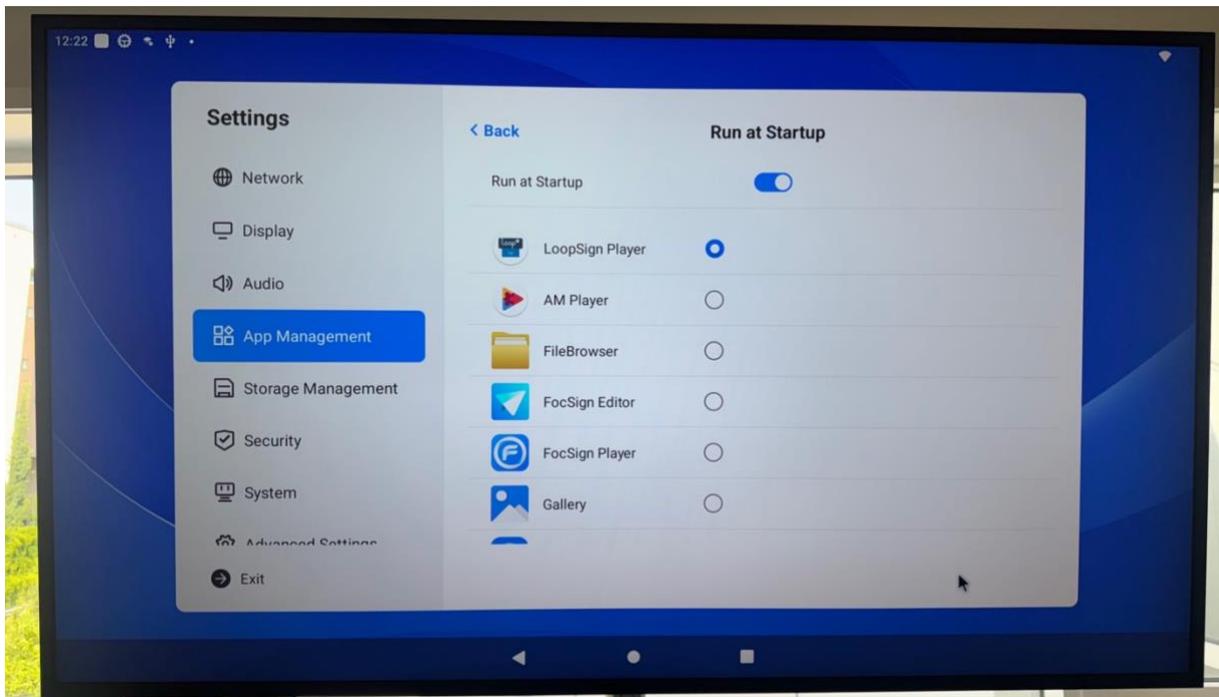

4 Set date/time and schedule settings



4.1 Set date/time settings

Make sure that the date/time settings of the screen are correct. Open the Settings app, go to “System” → “Date and time”, and then check that the settings are correct. (NTP sync recommended.)

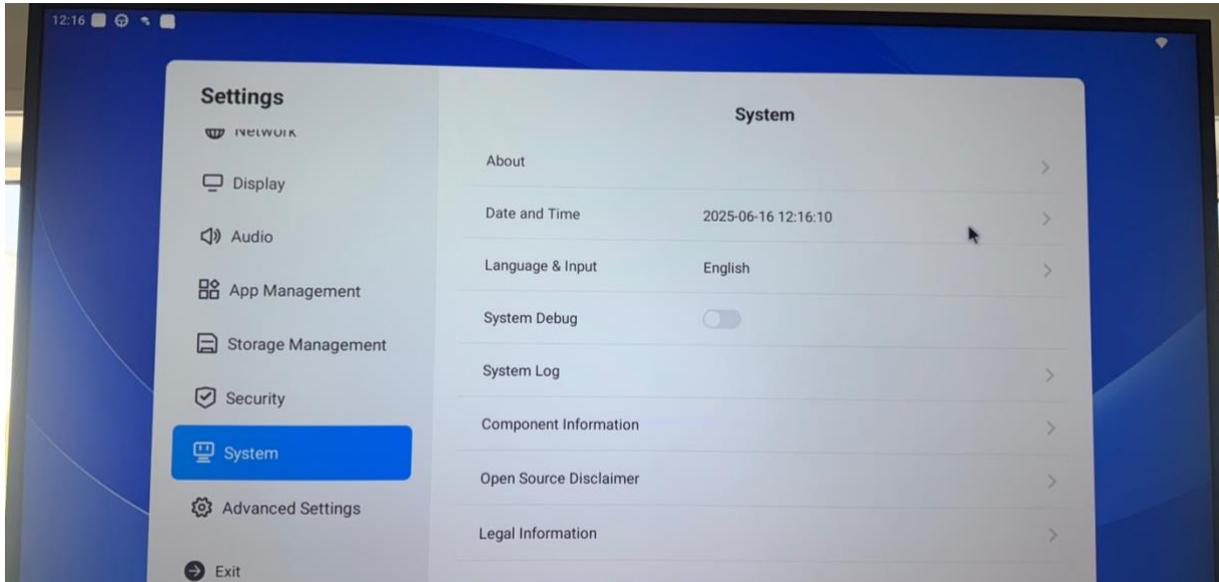

4.2 Set scheduled on/off of the display

Open the Settings app, go to “Advanced Settings” and activate “Scheduled Startup/Shutdown”. Then open “Startup/Shutdown Settings” and set your preferred schedule(s).

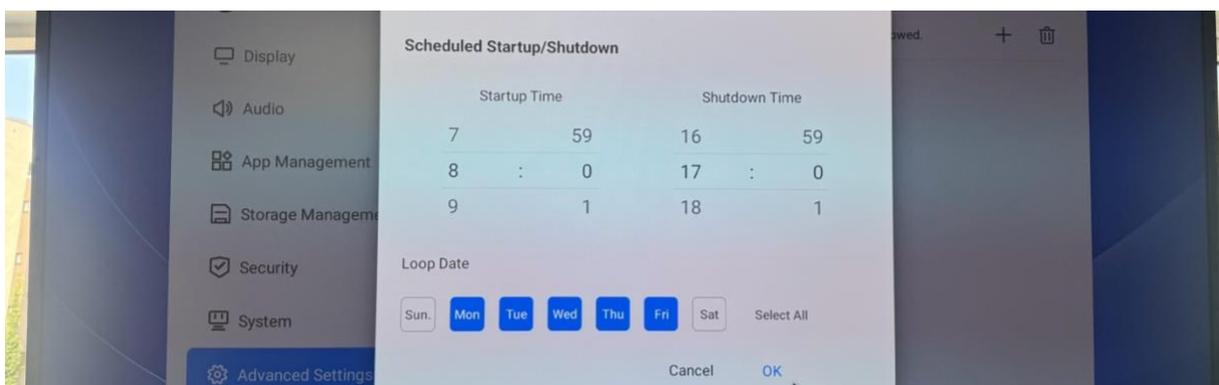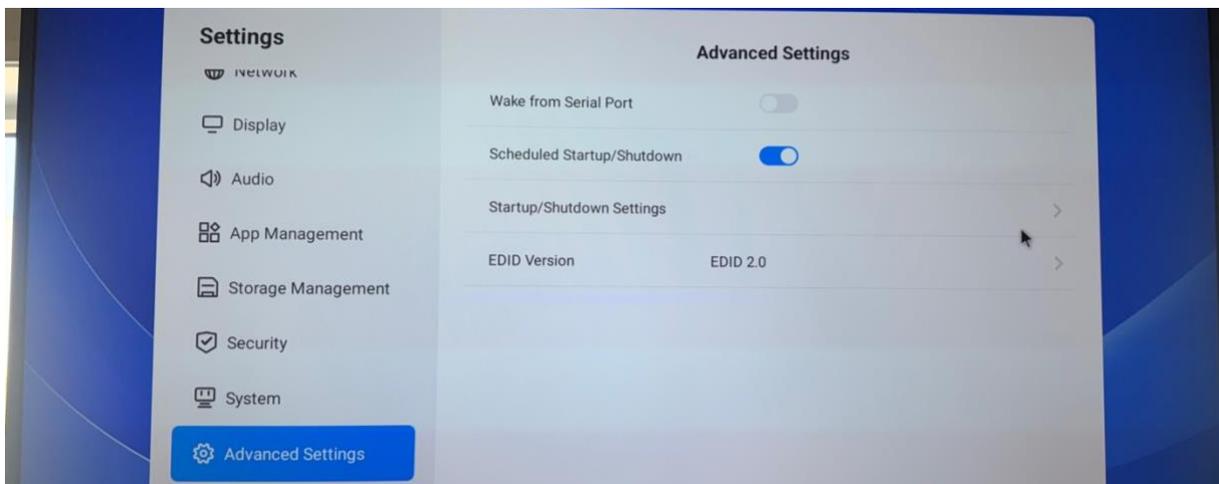



5 Open the LoopSign Player app



Open the LoopSign Player app from the app menu (or simply reboot the display to have it autostart). Use the unique hash code shown on the screen to enroll the display to your LoopSign account and show your content.





6 Enroll the display on your LoopSign account

Log in to LoopSign, and then click *Manage Screens*. After that, click *Devices* in the top menu. In the Devices overview, click *+Enroll* to add the display to your LoopSign account, using the hash code showing on the display. After that you can assign the display to a LoopSign screen to immediately have your display start playing your LoopSign content.

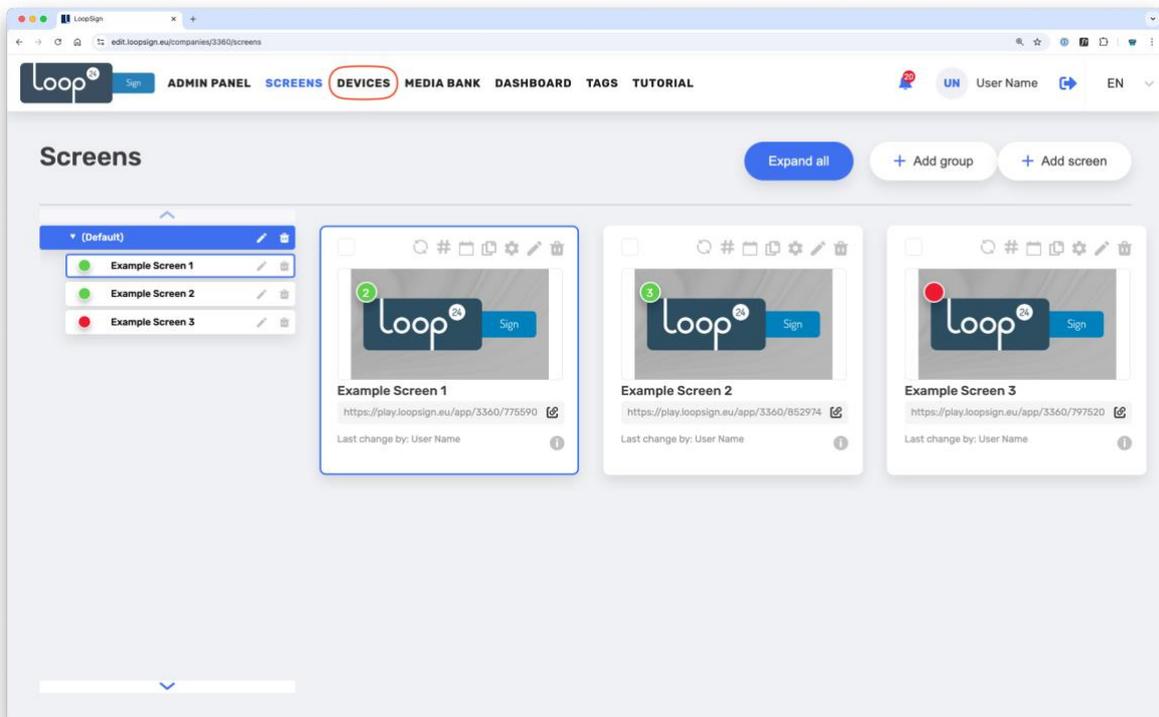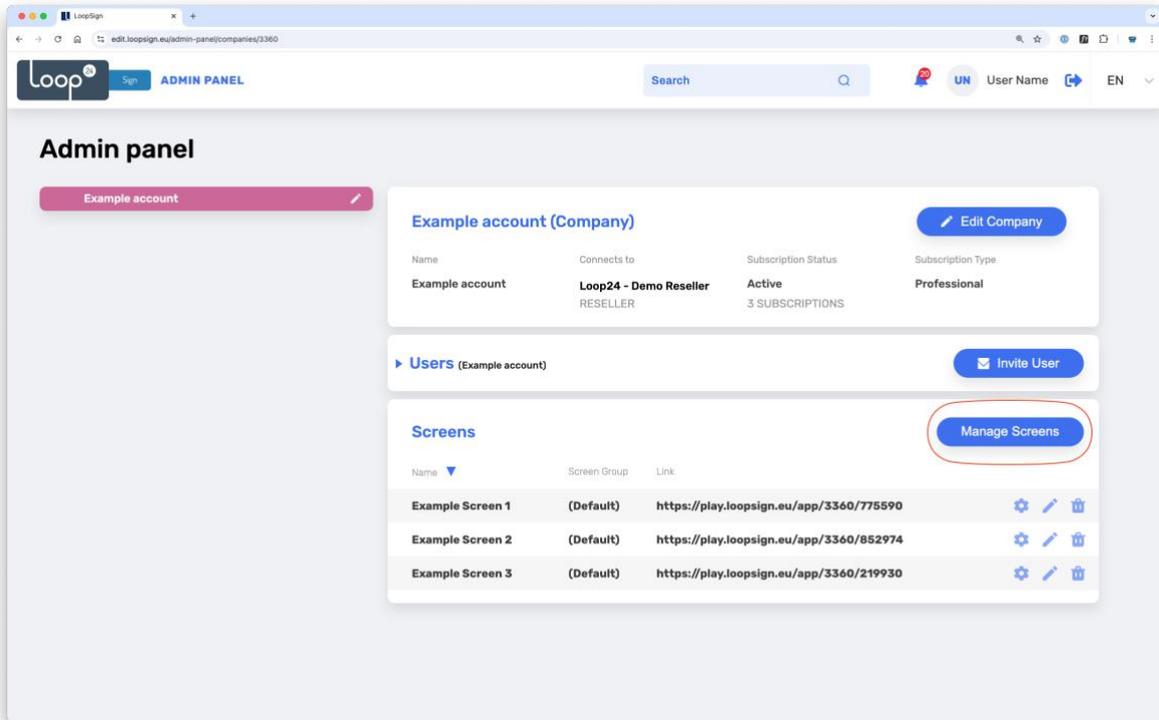

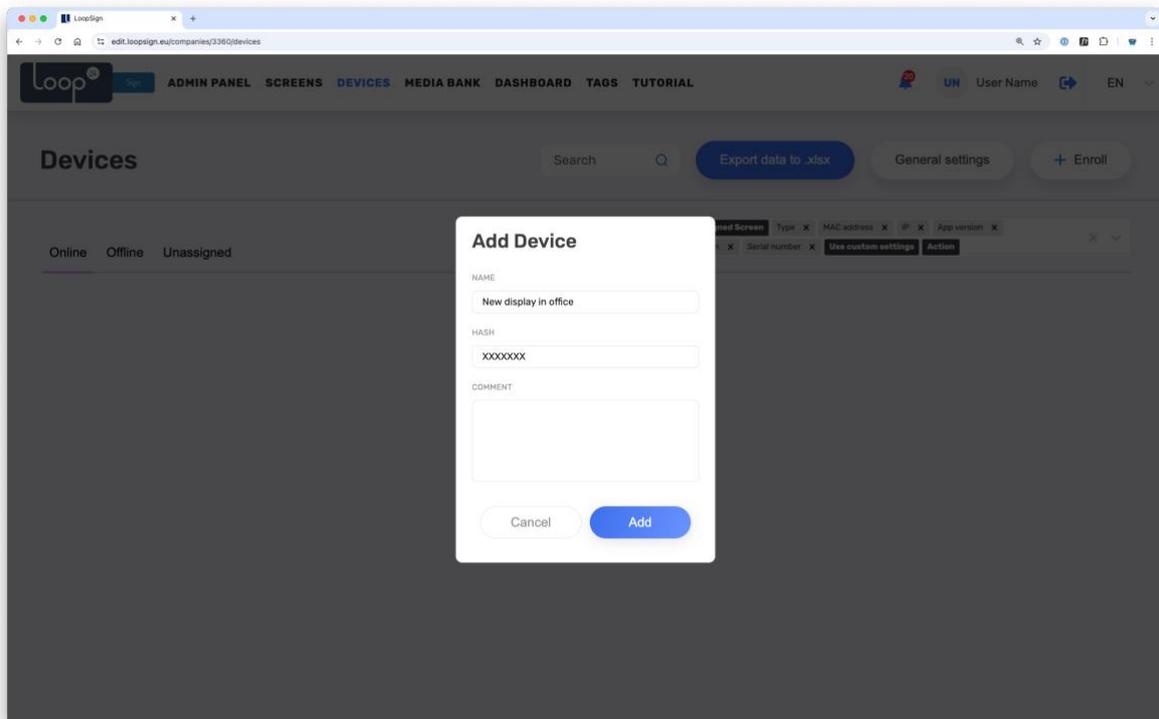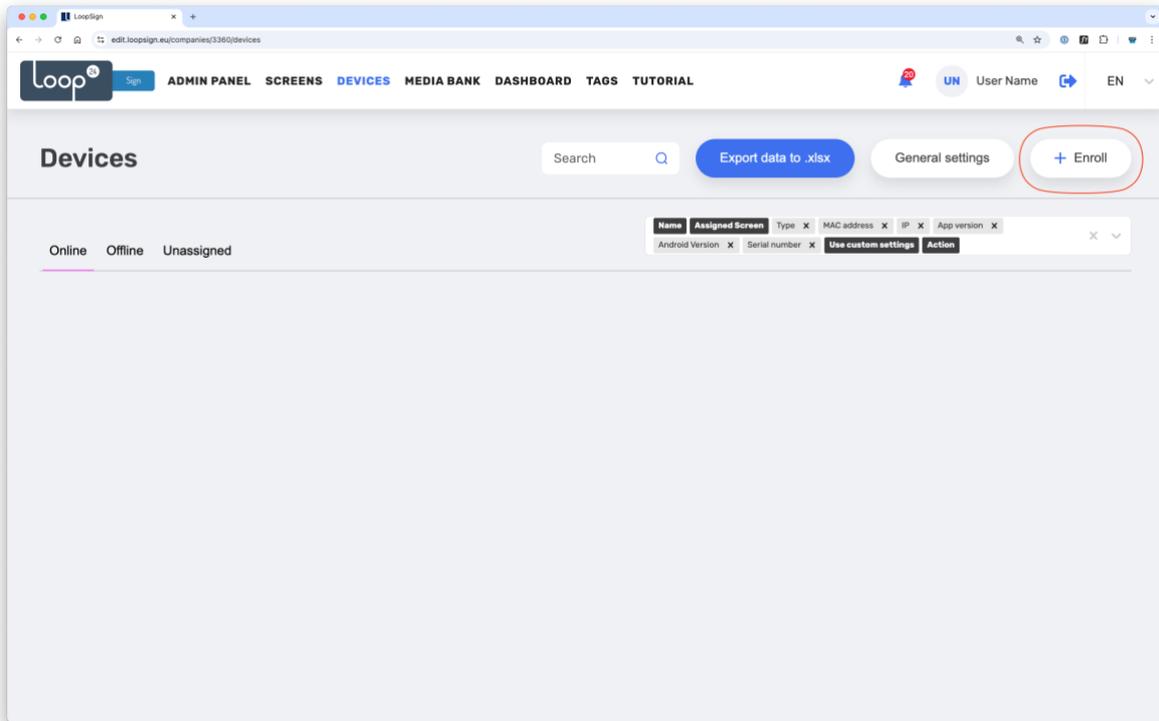

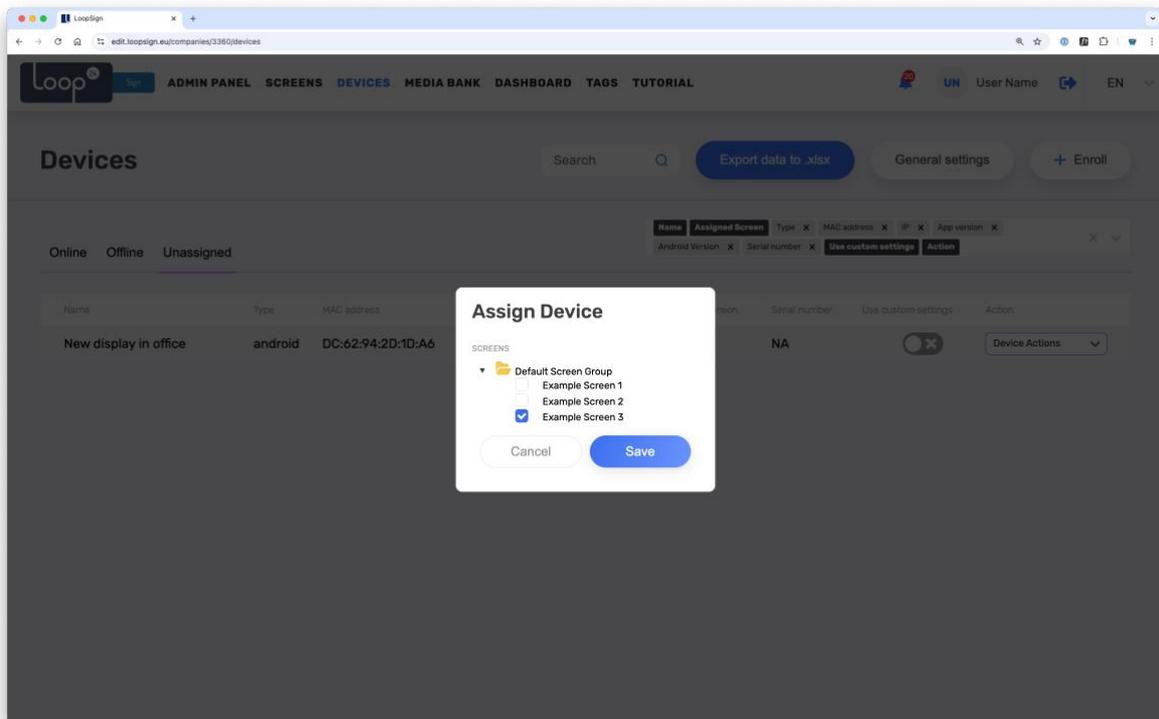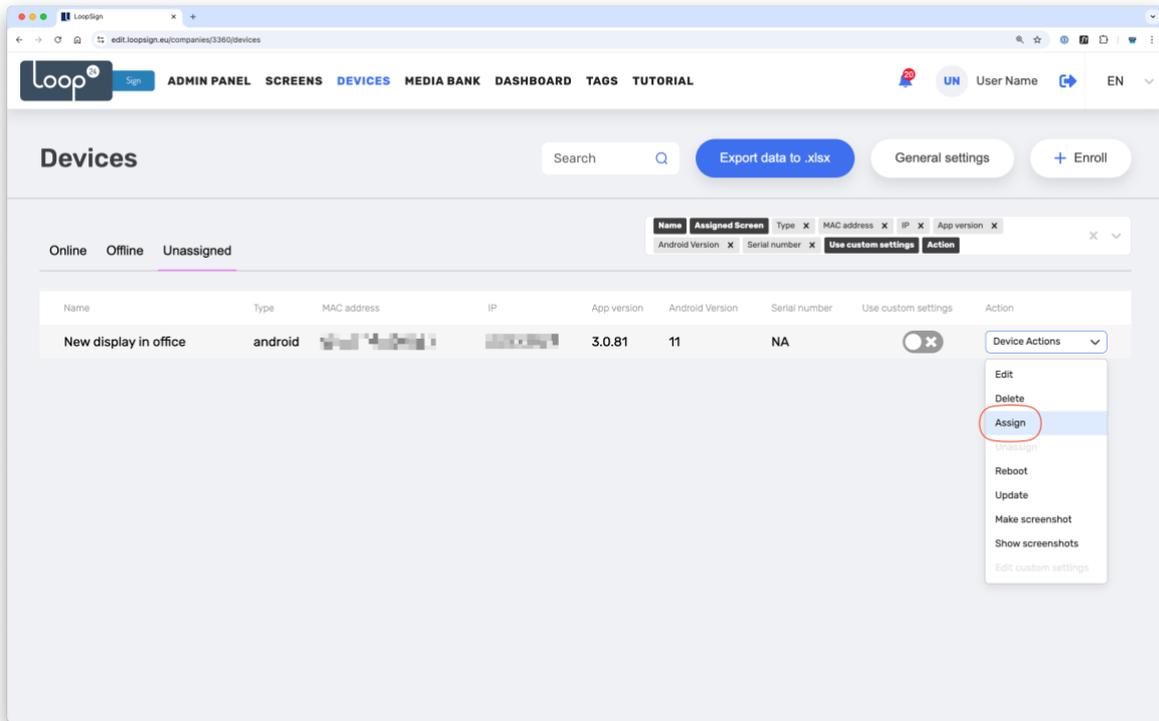

Congratulations! You've now successfully configured your display, enrolled it to your LoopSign account and assigned it to play content from a LoopSign screen.

