

Sony - LoopSign Deployment Guide

There are one preferred way to deploy LoopSign to your Sony screen and that is by utilizing the built in URL player (Web browser).

Content

1. General settings.....	2
1.1 Set Automatic Schedule on/off	2
2. Sony Android 7	2
2.1 Internal Web Browser configuration.....	2

1. General settings

Initially you must make sure your screen is internet connected and have basic configurations set. (Correct time zone, time/date and automatic on/off schedule.) Correct time/date is essential for LoopSign. Please refer to your operating manual.

1.1 Set Automatic Schedule on/off

It's highly recommended to configure automatic on off according to your needs.

To shut down the screen when it's not needed will prolong it's lifespan. Even if you require your screen to be on 24/7, schedule a short on/off each night (For example off 02:57 and on 03:00)

This to give your screen a daily reboot.

Please refer to your operating manual for configuration of automatic schedule on/off.

2. Sony Android 7


2.1 Internal Web Browser configuration

If the screen has been previously used, we recommend loading factory defaults. Please refer to you operating manual.


First you need to enter "Pro Mode"

You can do it directly from the remote (press I + mute vol + home) buttons.


Or select function "Start Pro mode" in the menu.

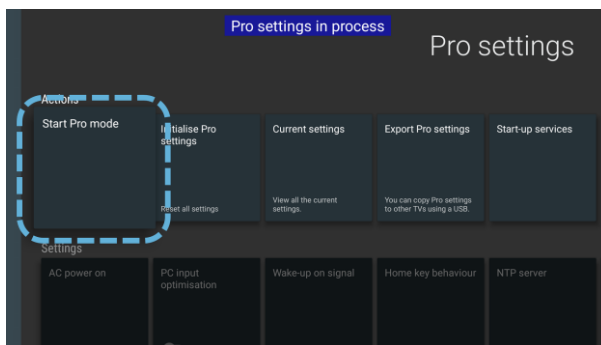


Notification appears. Select OK to proceed.

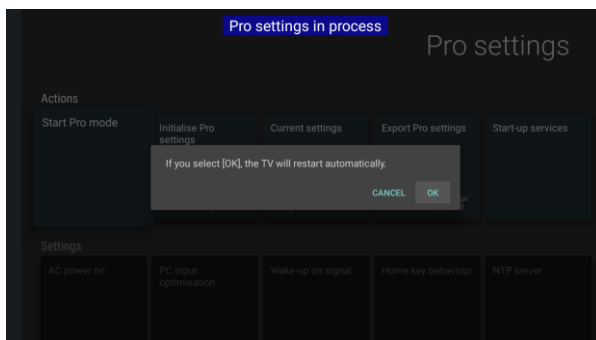


Setting is complete. The display will reboot and switch to Pro mode.

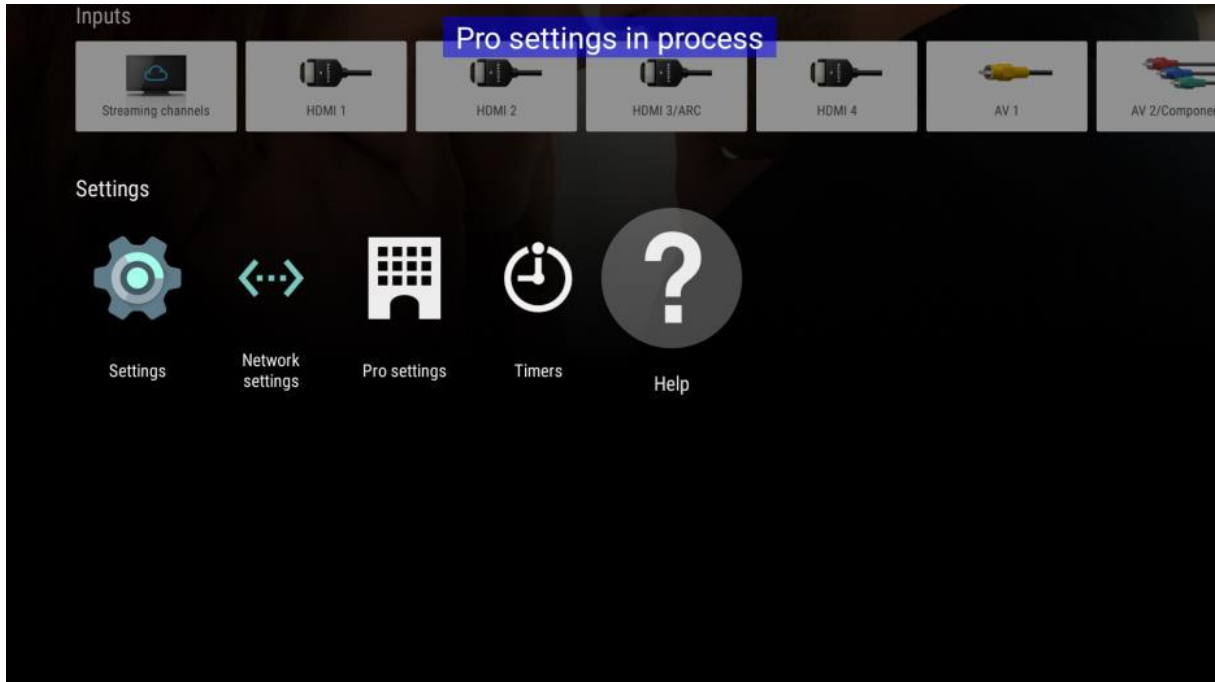

On the pro settings menu go to start-up app on the second line of the menu.
Enter the web page link that will be display in full screen without address bar

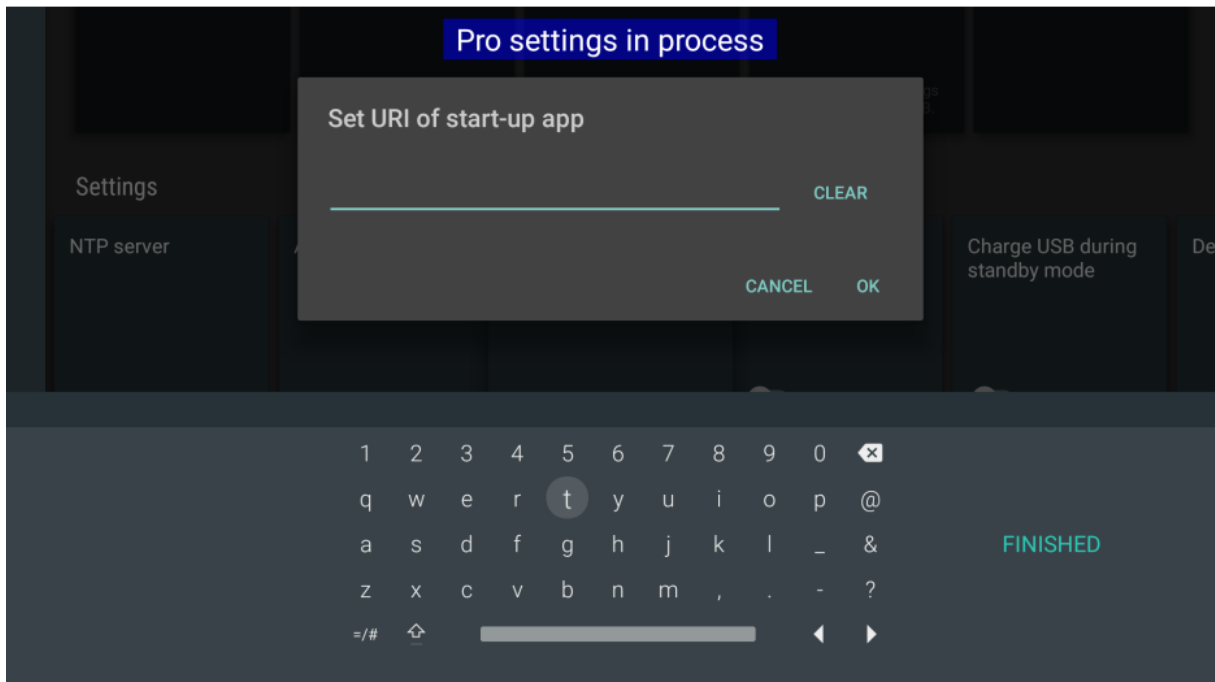

Go to Initial input source option (3rd line) and select the start-up app as initial input source

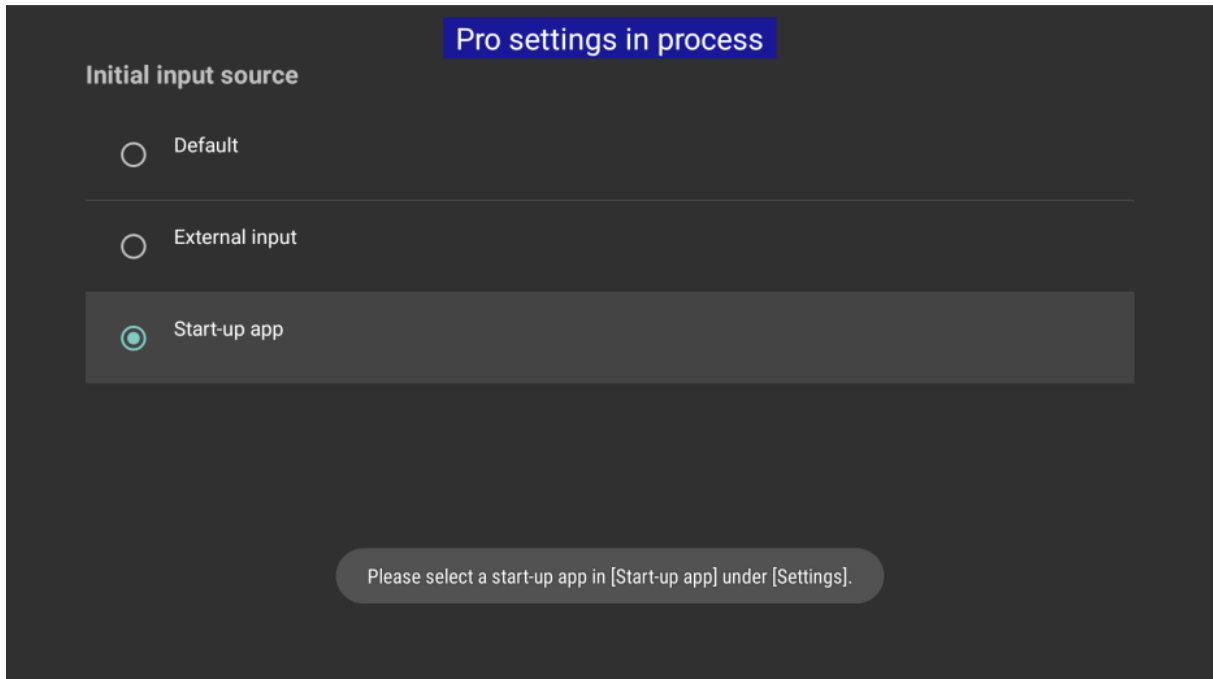

To finish activate the pro mode, the display will reboot directly to the webpage

