

How to Reload firmware on LoopMeeting LM-1052T with Android 10 and 11

1. Install driver support for LoopMeeting device

Download, unzip and install the Android RK device drivers

<https://loopmeeting.no/firmware/LMDriver.zip>

After installation, please reboot your computer.

2. Download and unrar/unzip tools and firmware

Download the Firmware loading tool and unzip it to a directory.

<https://loopmeeting.no/firmware/rktool.zip>

Download the correct Firmware version based on the production year/month.
and unrar the file

December 2021	https://loopmeeting.no/firmware/des21.rar
January 2022	https://loopmeeting.no/firmware/jan22.rar
April 2022	https://loopmeeting.no/firmware/apr22.rar
May 2022	https://loopmeeting.no/firmware/mai22.rar
June 2022	https://loopmeeting.no/firmware/jun22.rar
September 2022	https://loopmeeting.no/firmware/sept22.rar
December 2022	https://loopmeeting.no/firmware/des22.rar
February 2023	https://loopmeeting.no/firmware/feb23.rar

3. Load firmware to Loopmeeting panel


Connect a USB cable to your computer and to the micro USB port on the device
 Connect power while holding the “reset” button pressed with a paperclip or similar.

The reset button is just beside the LAN port in a small hole


Hold it for a few seconds then release the button (The device will stay black)

Start Android Tool

Check that you have «Found One LOADER Device” in the bottom line

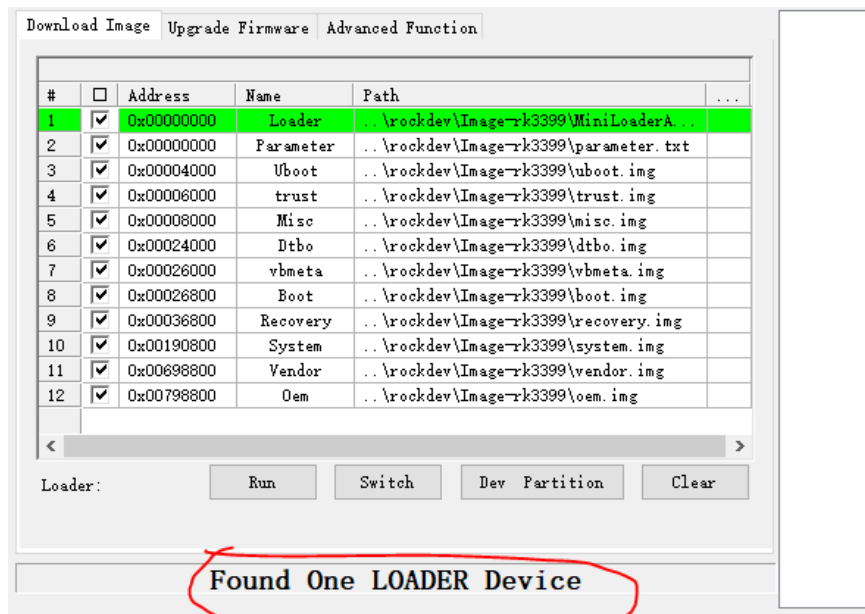


Select «Upgrade Firmware» in top menu

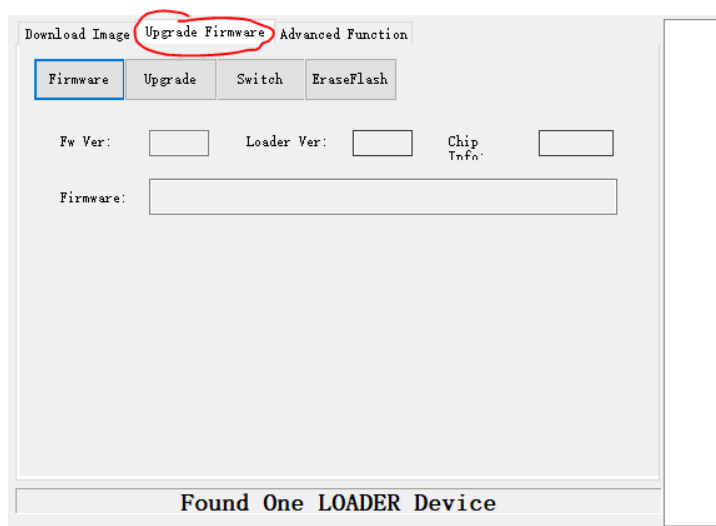


Select “Firmware” in the menu.

And browse/select the unzipped file you downloaded. (It will take a few seconds for it to load)

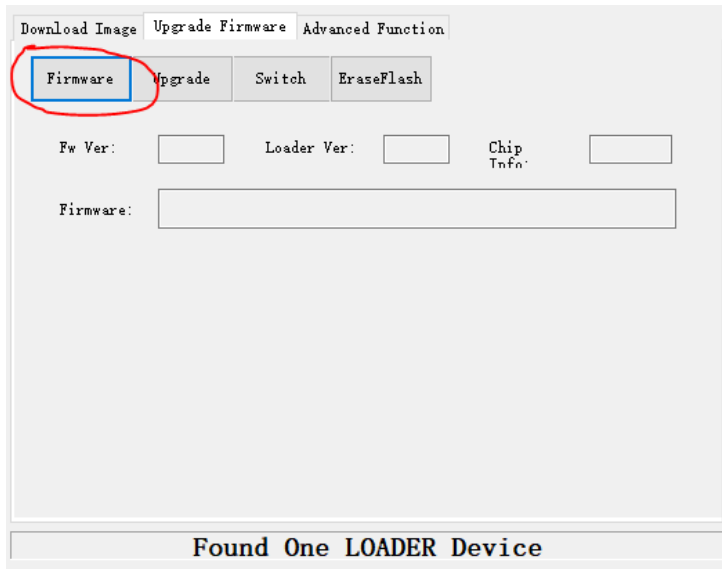

Then select menuitem “Upgrade”

This operation will take a few minutes.

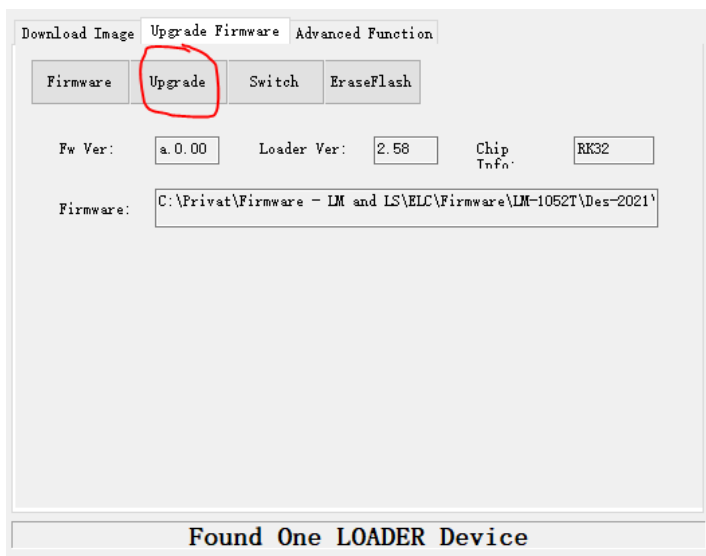

After the procedure is done LoopMeeting app will appear asking you to enter the license key.

(If you do not have the license key, please contact info@loop24.no and provide the serial number for the device.)

Please Update App before entering the License key and connect it to O365/Exchange/Google/LoopBooking environment.

This is done by selecting “Demo Mode” when the panel asks for License key.

Then select “Update App” and the panel will download and install the latest version.

If this fails, use option 4 as described in this link.

<https://loop24.no/loopmeeting/app-update/>