

# How to install LoopMeeting on a IADEA / Meetio panel

## 1. Load the panel with a "fresh" firmware.

(This to make sure the firmware is without the Meetio application.)

#### Go to IADEA support page:

https://support.iadea.com/hc/en-us/articles/900003536086-XDS-1078-Firmware-Android-7-1-OS

Note: If you have a different Android version on your panel, please select the version that corresponds to the model you have.

#### Download firmware.

#### **Upgrade instructions**


- Download the latest firmware using Chrome or Firefox web browser and copy it onto root directory of an USB drive
- Power on device and plug in USB mouse to the device
- From Basic Settings menu, go to Advanced > System > Firmware Update. Insert USB drive to the device and do NOT remove USB drive until player reboots to the Basic Settings menu

### 2. Configure the panel

#### https://loop24.no/lmoem.zip


- Unzip the .APK file and copy it to a USB stik
   (Use the same as you used for the firmware update)
- Plug in the USB stick in the IADEA panel.
- Start IADEA the panel
- Select «Advanced»



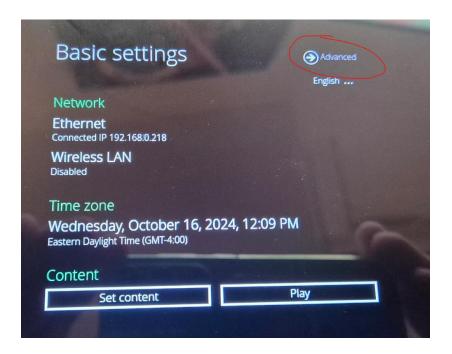

- Press on the «Time Zone» area


Set correct timezone, enable "24-hour format" and «Automatic date & Time»

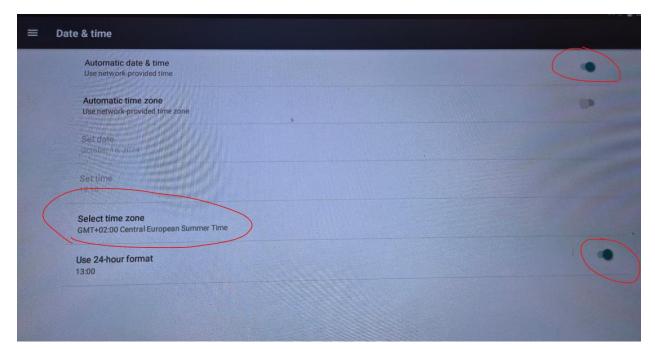




Go back by pressing the «Arrow back» in the bottom menu

Then, from this picture drag finger from top and down and press the USB icon

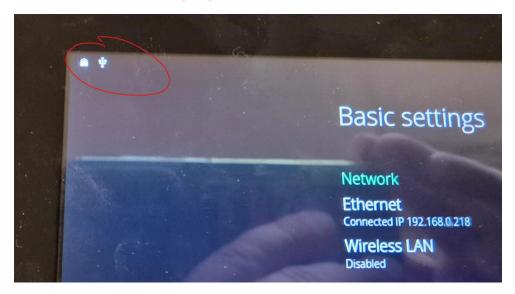


Select your USB drive

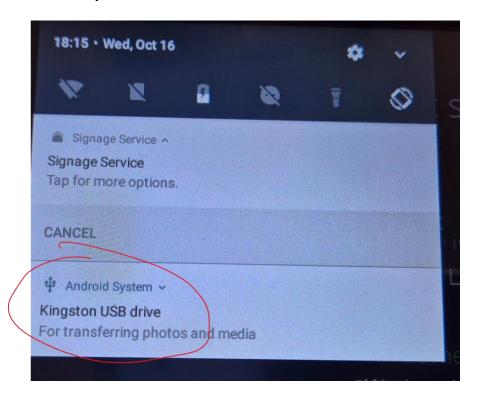




### Find and select the LoopMeeting APK file

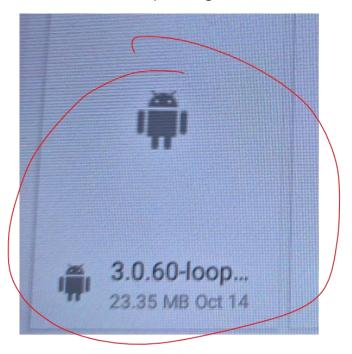

Confirm that it accepts to be installed from «Unknow sources" and select the file again to install.

Important: When the file is installed, select «Open» Then it will set important basic settings

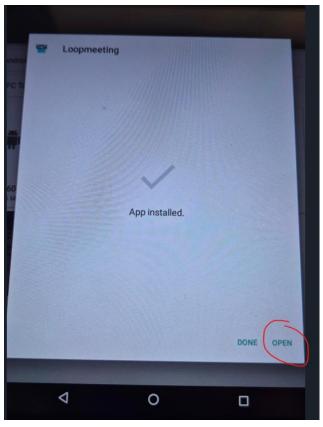


© Loop24 AS, Olf Helsets vei 6, 0694 Oslo, Norway - info@loop24.no - https://loop24.no Page: 4




Exit the app / restart the panel so come back to the default start screen.

Then select "Advanced"

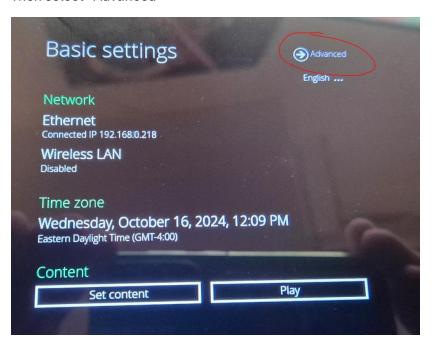


Then select "Content" then select "App Start

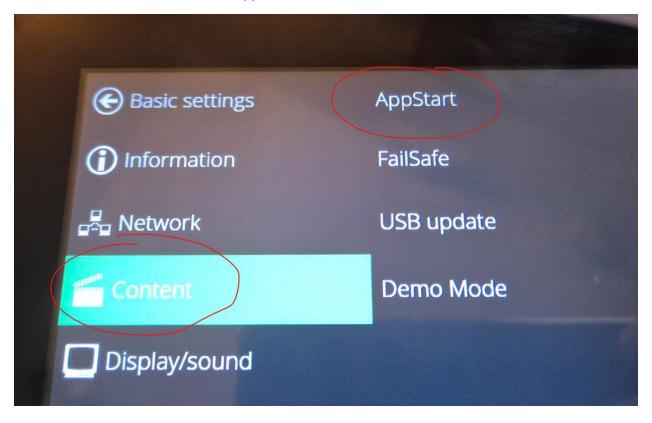



Then write in exactly as shown below. (This will make sure the app autostarts in "kiosk" mode.

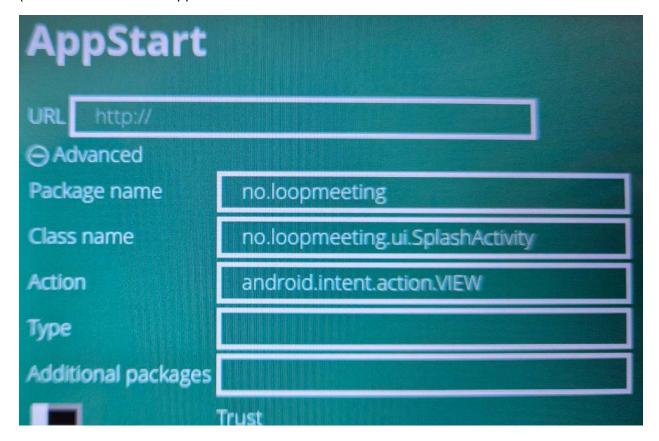


Package Name: no.loopmeeting

Class name: no.loopmeeting.ui.SplashActivity

Action: android.intent.action.VIEW

Scroll down and Press "Set" in bottom

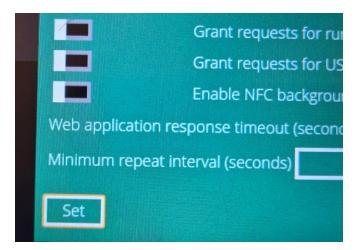



Press menu item "Play" It should now briefly say "Screen pinned" and it should start LoopMeeting app.

